

# T SERIES

## CENTROS DE MECANIZADO UNIVERSALES DE 5 EJES


MODELOS T12 / T16 / T22 / T30 / T36

**IBARMIA.**  
YOUR MACHINE TOOL POINT

Amplia gama de soluciones para el mecanizado avanzado en 5 ejes de piezas de gran diámetro, orientada a la alta productividad mediante la multifunción y la automatización de las máquinas.



**T SERIES**

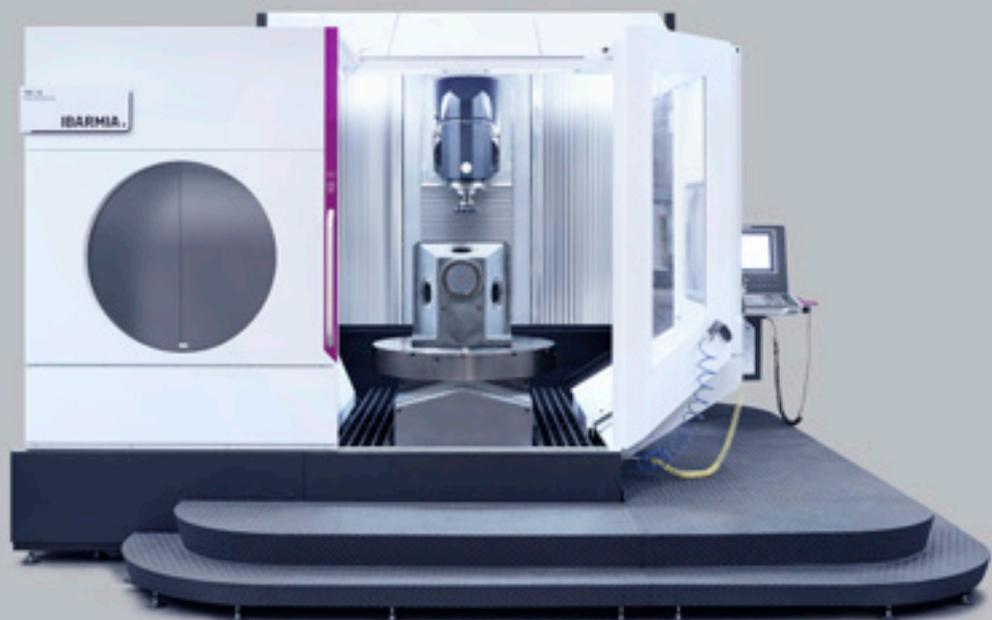

[www.ibarmia.com](http://www.ibarmia.com)



T SERIES

# YOUR MACHINE TOOL POINT

**IBARMIA.**

## INTRO

**Technology and Innovation.** For those customers looking for big swing diameters or aiming to machine in a single set up, IBARMIA presents the T Series models, whose serial name refers to the bed shape and the configuration of X / Y axes, in combination with different head types and rotary tables. The entire range of machines is available with single table or multiple table solutions, and in MULTIPROCESS version (multitasking center) or in EXTREME version (milling center) increasing the versatility and flexibility of the machine.

- [1\\_ General view](#)
- [2\\_ Application industries](#)
- [3\\_ Advantages](#)
- [4\\_ Characteristics](#)
- [5\\_ Machine Configuration](#)
- [6\\_ The range](#)
- [7\\_ Technological integration](#)
- [8\\_ Technical data](#)




**T SERIES**

**1\_ GENERAL VIEW**


**HIGH PRODUCTIVITY MACHINES**

The T SERIES is designed for high productivity of heavy pieces thanks to its high load capacity rotary tables and powerful spindles. Its award-winning tilting heads provide the speed, accuracy and reliability required for the most complex jobs. The most advanced automation solutions for automatic pallet

changing and special head changing operations, make the T SERIES the ideal solution for the most demanding production requirements. The MULTIPROCESS models integrate milling, turning and grinding capacity, reducing the number of machines required to produce a wide range of pieces.

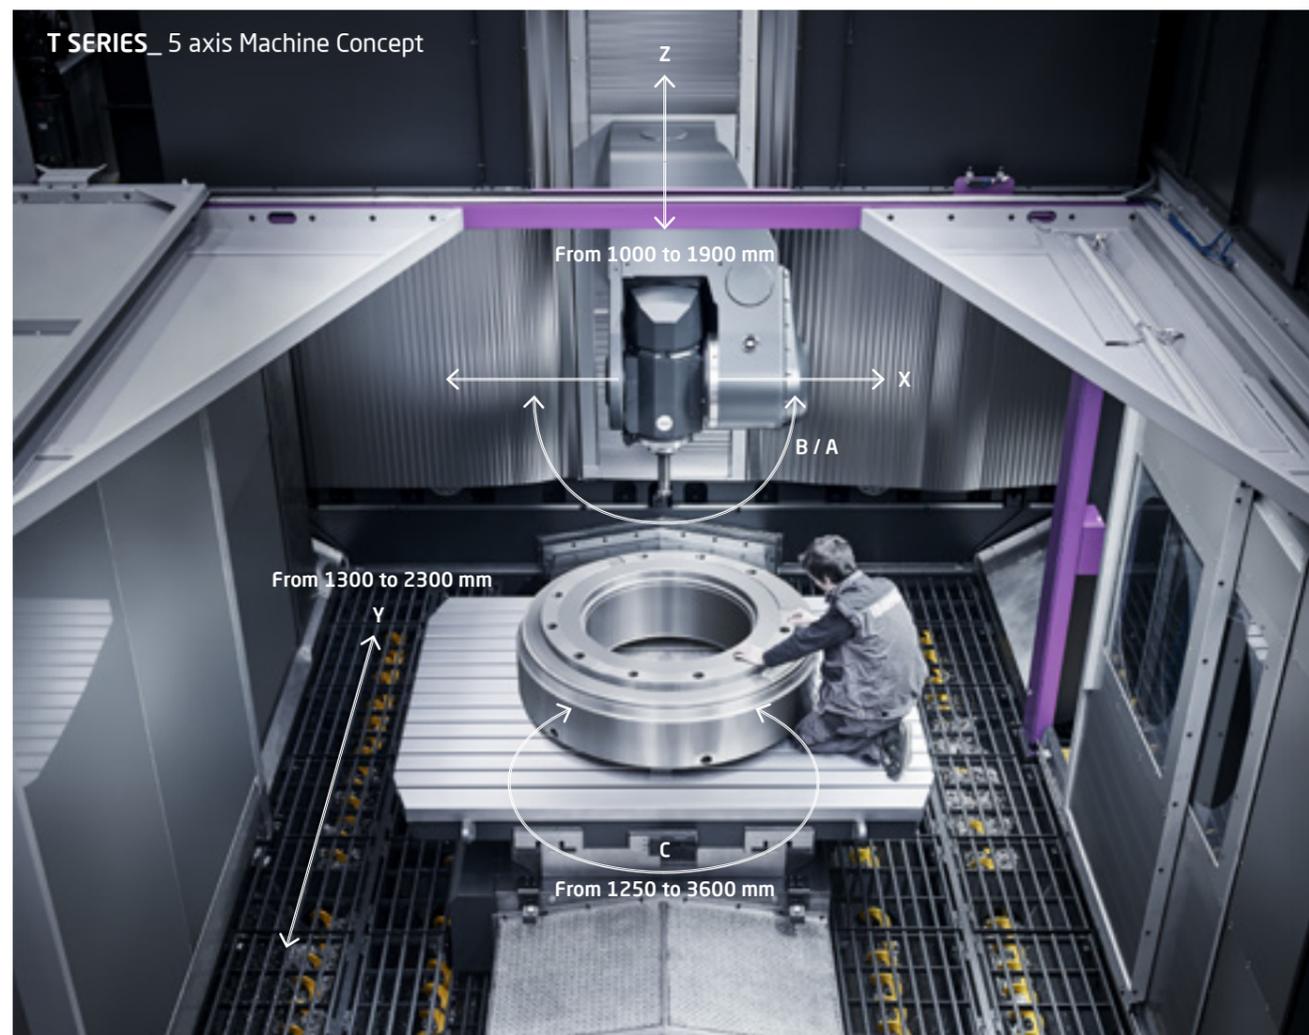

**MACHINE SIZES**

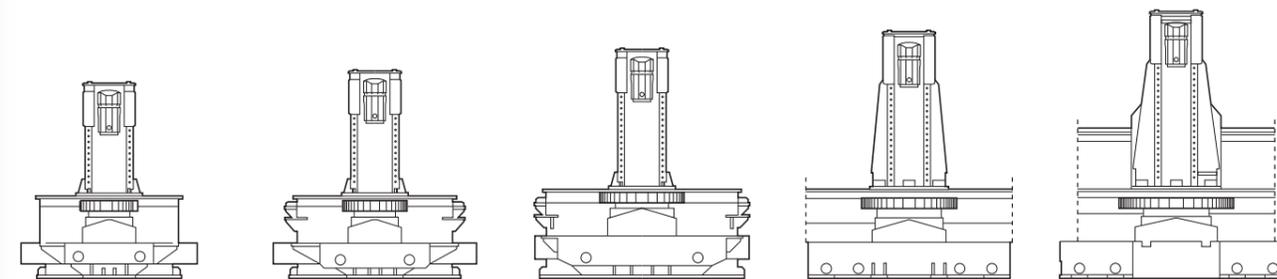

Maximum swing diameter  
ø 1250 mm  
Maximum part height  
h 1600 mm  
Maximum load capacity  
4500 Kg



Maximum swing diameter  
ø 1600 mm  
Maximum part height  
h 1700 mm  
Maximum load capacity  
6000 Kg



Maximum swing diameter  
ø 2200 mm  
Maximum part height  
h 1750 mm  
Maximum load capacity  
10.000 Kg



Maximum swing diameter  
ø 3000 mm  
Maximum part height  
h 1950 mm  
Maximum load capacity  
20.000 Kg



Maximum swing diameter  
ø 3600 mm  
Maximum part height  
h 2150 mm  
Maximum load capacity  
25.000 Kg

**SPINDLE HEADS**



**THC\_ B axis head**  
Maintain the same tool center point across the full range  
-15°/+195°



**THR\_ A axis head**  
Fork type spindle head ideal for negative angles  
-45°/+135°



**High torque & high speed**  
Latest technology electrospindles



**Direct Drive Technology**  
Torque motor transmission working tables



**PERFORMANCE LEVELS**



**T MULTIPROCESS**  
Universal machining centers for 5-axis vertical milling and turning operations.  
Tool holder: HSK A-100 / Capto C8




**T EXTREME**  
Universal machining centers for 5-axis / 5-sided milling operations.  
Tool holder: SK 50 / BT 50 / HSK A-100

- [1\\_ General view](#)
- [2\\_ Application industries](#)
- [3\\_ Advantages](#)
- [4\\_ Characteristics](#)
- [5\\_ Machine Configuration](#)
- [6\\_ The range](#)
- [7\\_ Technological integration](#)
- [8\\_ Technical data](#)

**2\_ APPLICATION INDUSTRIES**

**5-AXIS ADVANCED MACHINING**

The T SERIES is the ideal solution for high production of medium and large size cubic pieces in a single set up, with power and accuracy. A generous workspace and the combination of linear and rotary axes, offer a wide range of solutions for advanced machining in 5 axes / 5 faces on parts up to  $\varnothing 3600$  mm and h2150 mm in a wide range materials and the most complex geometries.

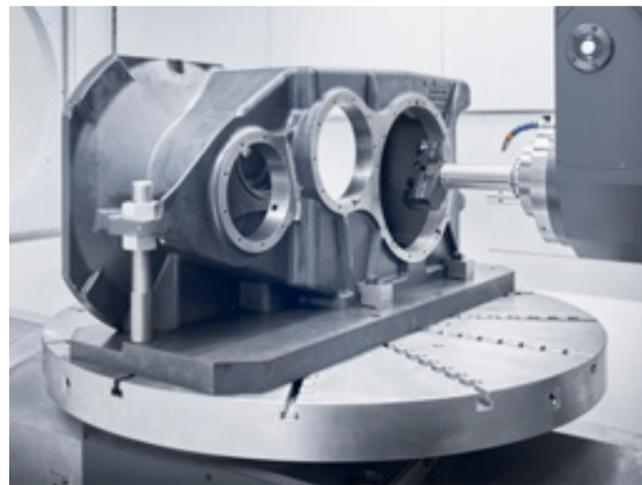


**RANGE OF MACHINING**



MULTI  
PROCESS  
TECHNOLOGY

5  
AXIS

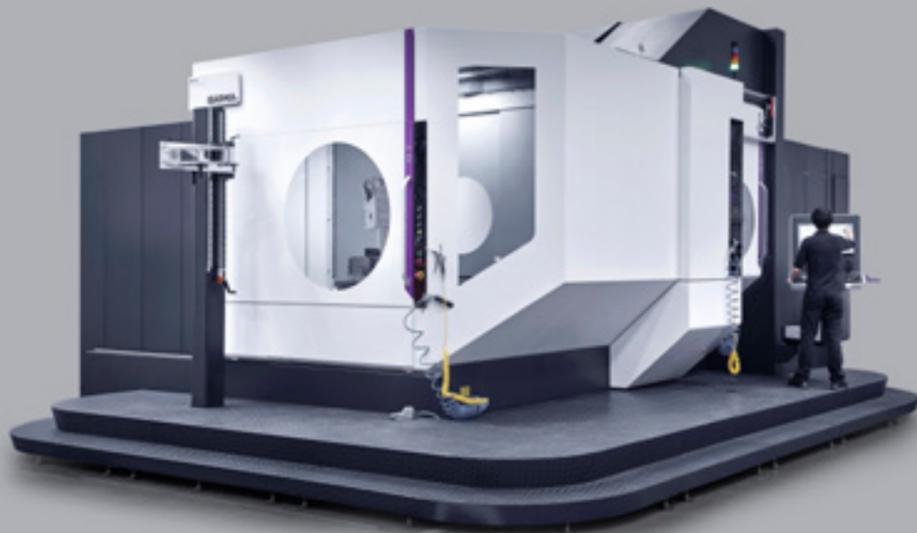

**T SERIES**

**SAMPLE APPLICATIONS**



Fluid end



Industrial mold



Compressor Cylinder



Turbocharger housing



Valve body



Engine block



Roller cage for bearings



Ram Bop



Aerospace engine housing

**INDUSTRIES & MATERIALS**



OIL & GAS



MOLD & DIE



AEROSPACE



AUTOMOTIVE



RAILWAY



MACHINERY



YELLOW GOODS

Low-Alloy Steel | Grey Cast Iron | Nickel based Super Alloy | Austenitic Stainless Steel | Titanium based Alloy | Aluminum based Alloy | Extra hard Steel


<b>1_ General view</b>
<b>2_ Application industries</b>
<b>3_ Advantages</b>
3.1_ Increase machine travels
<b>4_ Characteristics</b>
<b>5_ Machine Configuration</b>
<b>6_ The range</b>
<b>7_ Technological integration</b>
<b>8_ Technical data</b>

CREATE YOUR OWN MACHINE WITH THE IBARMIA T SERIES; AN UNRIVALLED PROPOSAL IN TERMS OF MACHINE CONFIGURATION POSSIBILITIES

### 3.1\_ ADVANTAGES / MACHINE CUSTOMIZING

#### INCREASE MACHINE TRAVELS

The T SERIES offers a balanced range of construction sizes, designed to meet the needs of advanced machining on a wide range of part sizes. However, given IBARMIA's customer orientation and the varied market requirements, the programme also offers a higher flexibility with the possibility of increasing both the vertical and transversal travels as well as the overhanging of the spindle neck.

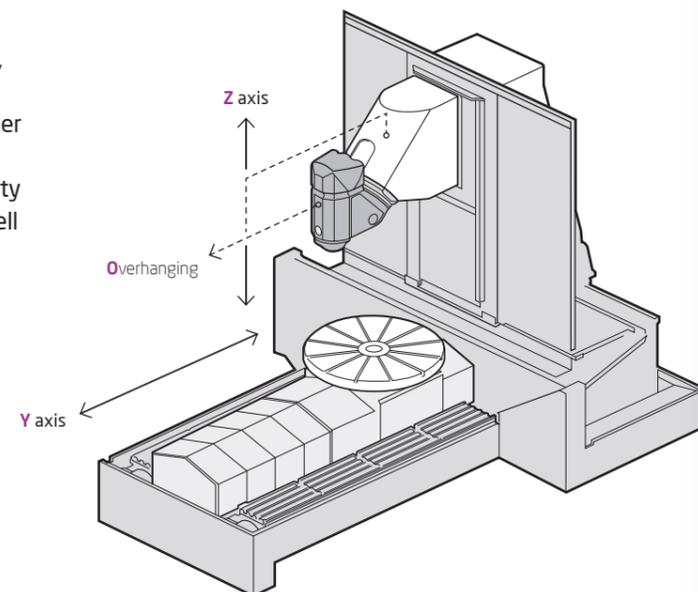

"ADAPT MACHINE TRAVELS TO YOUR PRODUCTION REQUIREMENTS, MAINTAINING THE SAME ACCURACY, RIGIDITY AND DURABILITY"\*

#### TRAVEL INCREASES BY MACHINE SIZES

T12

Parts up to  
h 1600 mm / 4.500 Kg  
Linear axes (mm)  
**X 1200 Y 1300 Z 1000**  
Axis can be increased  
**Z +200**  
Overhanging (mm)  
Can be increased up to  
125 mm

T16

Parts up to  
h 1700 mm / 6.000 Kg  
Linear axes (mm)  
**X 1600 Y 1600 Z 1200**  
Axis can be increased  
**Z +300**  
Overhanging (mm)  
Can be increased up to  
125 mm

T22

Parts up to  
h 1750 mm / 10.000 Kg  
Linear axes (mm)  
**X 2200 Y 1600 Z 1500**  
Axes can be increased  
**Y +150 / 300 Z +200**  
Overhanging (mm)  
Can be increased up to  
150 mm

T30

Parts up to  
h 1950 mm / 20.000 Kg  
Linear axes (mm)  
**X 3000 Y 2000 Z 1700**  
Axes can be increased  
**Y +150 / 300 Z +200**  
Overhanging (mm)  
Can be increased up to  
100 mm

T36


Parts up to  
h 2150 mm / 25.000 Kg  
Linear axes (mm)  
**X 3600 Y 2300 Z 1900**



#### SAME SWING, INCREASED VERTICAL TRAVEL

The possibility of increasing the vertical travel while maintaining the same swing diameter means that the whole assembly does not have to be oversized to obtain this gain, which is particularly advantageous for those companies who only require more vertical travel and do not need to opt for a larger model.

- [1\\_ General view](#)
- [2\\_ Application industries](#)
- [3\\_ Advantages](#)
- [3.2\\_ Extensive tool management](#)
- [4\\_ Characteristics](#)
- [5\\_ Machine Configuration](#)
- [6\\_ The range](#)
- [7\\_ Technological integration](#)
- [8\\_ Technical data](#)

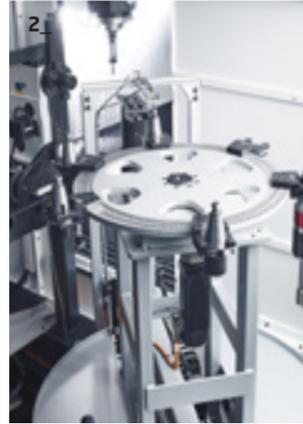

### 3.2\_ ADVANTAGES / MACHINE CUSTOMIZING

## MULTIPLE SOLUTIONS FOR TOOLS AND SPECIAL HEADS MANAGEMENT

The T SERIES offers a wide range of flexible and modular solutions in the field of tool management and tool storage. From modular chain magazines to compact solutions such as polar magazines for standard tools, or the management of long tools and/or special heads managed by a robot arm, the T SERIES offers a wide range of flexible and modular solutions in the field of tool management and storage by robot arm.



#### Tailored to our customers

We offer intelligent tool management options such as tool reading on the tool, reducing set-up times and errors due to manual data input, as well as various devices for monitoring tool breakage and wear by means of probing, laser beam or spindle consumption measurement.

## TOOL MANAGEMENT SOLUTIONS DESIGNED AND CUSTOMISED ACCORDING TO THE NEEDS OF OUR CUSTOMERS


The tool management unit is located outside the working area, separated from the main structure of the machine so that its movements are not transmitted to the machine, allowing a wide range of solutions:

- 1\_ Servo-driven vertical chain magazines of 120-240-360 positions. Tool changes up to 7" (chip to chip) for tools up to 600 mm and 30 kg.
- 2\_ Integrated pick ups, associated with double holder changeover for long and/or heavy tools.


3\_ Compact solution in polar magazines with configurations for 134 and 255 tools.

4\_ Loading stations located on the outside of the area for manual supply of tools to the magazine without interruptions.

5\_ Polar magazines with up to 400 positions, managed by double holder robot arm, combining tool and special heads change. Configurations according to the weight of tools and heads: up to 40 Kg or up to 100 Kg.

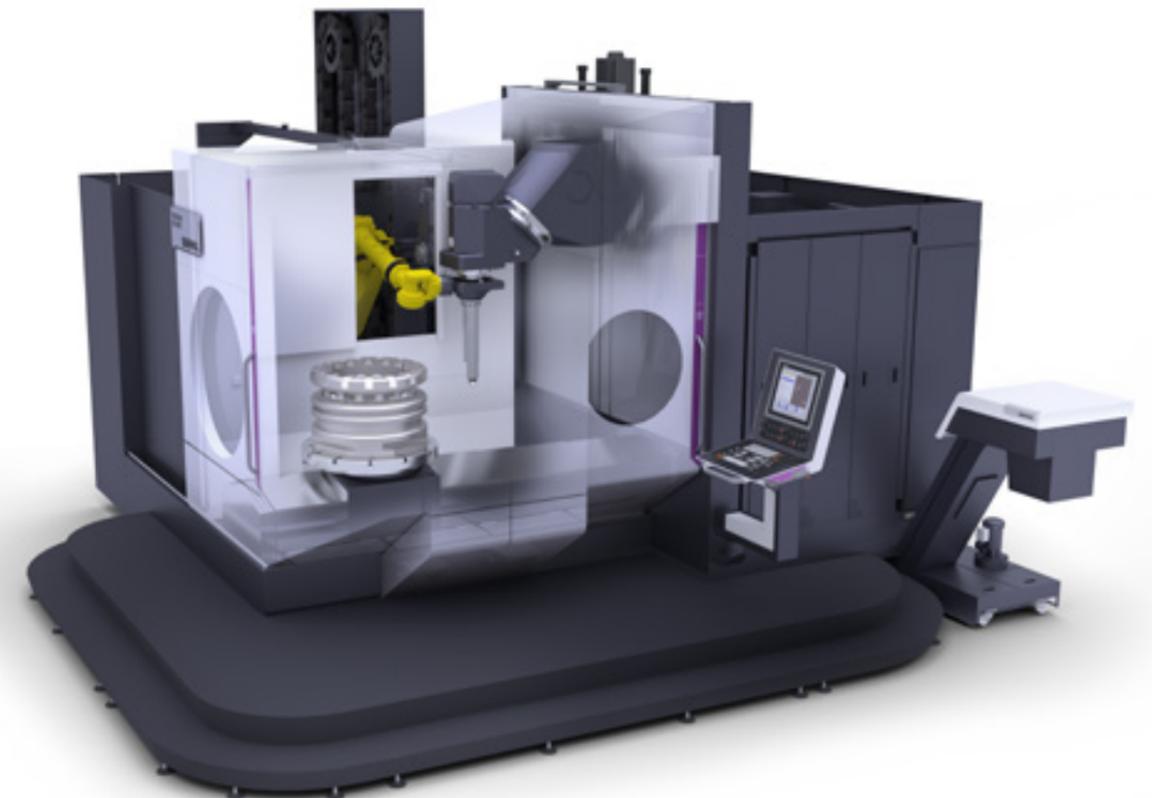

- [1\\_ General view](#)
- [2\\_ Application industries](#)
- [3\\_ Advantages](#)
- [4\\_ Characteristics](#)
- [4.1\\_ Dynamics, Power & Accuracy](#)
- [5\\_ Machine Configuration](#)
- [6\\_ The range](#)
- [7\\_ Technological integration](#)
- [8\\_ Technical data](#)

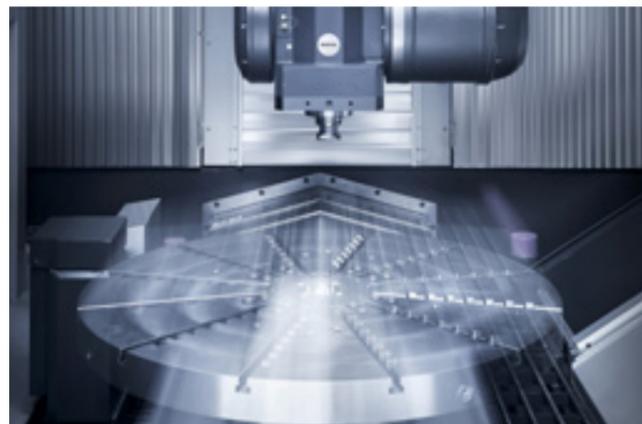

**4.1\_ CHARACTERISTICS / PERFORMANCE**

**DYNAMICS, POWER & ACCURACY**

**Structural bodies of maximum rigidity** optimised by finite elements (FEM). X / Y / Z axes over linear guides with preloaded rolling shoes with two rows of circulating rollers. Rectified ball screws of high precision with preloaded double nuts for the longitudinal axis movement. Geometric verification with direct measurement systems on the 5 machining axes (linear and rotary).

**New thermo-symmetrical and thermostable structure design** complemented with digital thermal twin models. Thermal compensation system on the electrospindle and heat source isolation.



THC | B AXIS HEAD




THR | A AXIS HEAD



**SUPERIOR TECHNOLOGY B or A AXIS HEADS\_**

- TORQUE MOTOR technology.
- Fast, continuous and accurate movements.
- Measured by rotary scale.
- Turning torque S1: 1210 Nm
- Clamping force: 7000 Nm
- Cast iron turning body housing.

**DIRECT DRIVE TECHNOLOGY NC ROTARY TABLES**



**Available in all the range\_**

Maximum dynamics in turning operations and positioning accuracy in milling operations, without the need for additional mechanical devices or the use of position locking.

- High dynamics and torque: Up to 500 rpm - 12.000 Nm.
- High power, up to 120 kW.
- High workpiece weight, up to 22.500 kg.

- **Positioning (ISO 230-2): 6 µm**
- **Repeatability (ISO 230-2): 5 µm**

\*Data based on the T12 model




**PRECISION PLUS PERFORMANCE CONCEPT**

**Optional machine manufacturing measures:**

- Machine manufacturing in thermo stable assembly area.
- Structural finishing by hand scraping manufacturing.

**Integral cooling measures to improve the thermal behaviour of the machine:**

- 1\_ Spindle head**
  - Motorised electrospindle.
  - Direct Drive torque motor B axis.
  - Direct Drive torque motor A axis.
- 2\_ Rotary table**
  - Bearing.
  - Direct Drive torque motor.
- 3\_ Basic structure**
  - X / Y / Z axis motors.
  - Support motors X / Y / Z axes.
  - Ball screw nut support X / Y / Z axes.
  - Bearing support combined Z axis.
  - Coolant chiller with PID control.

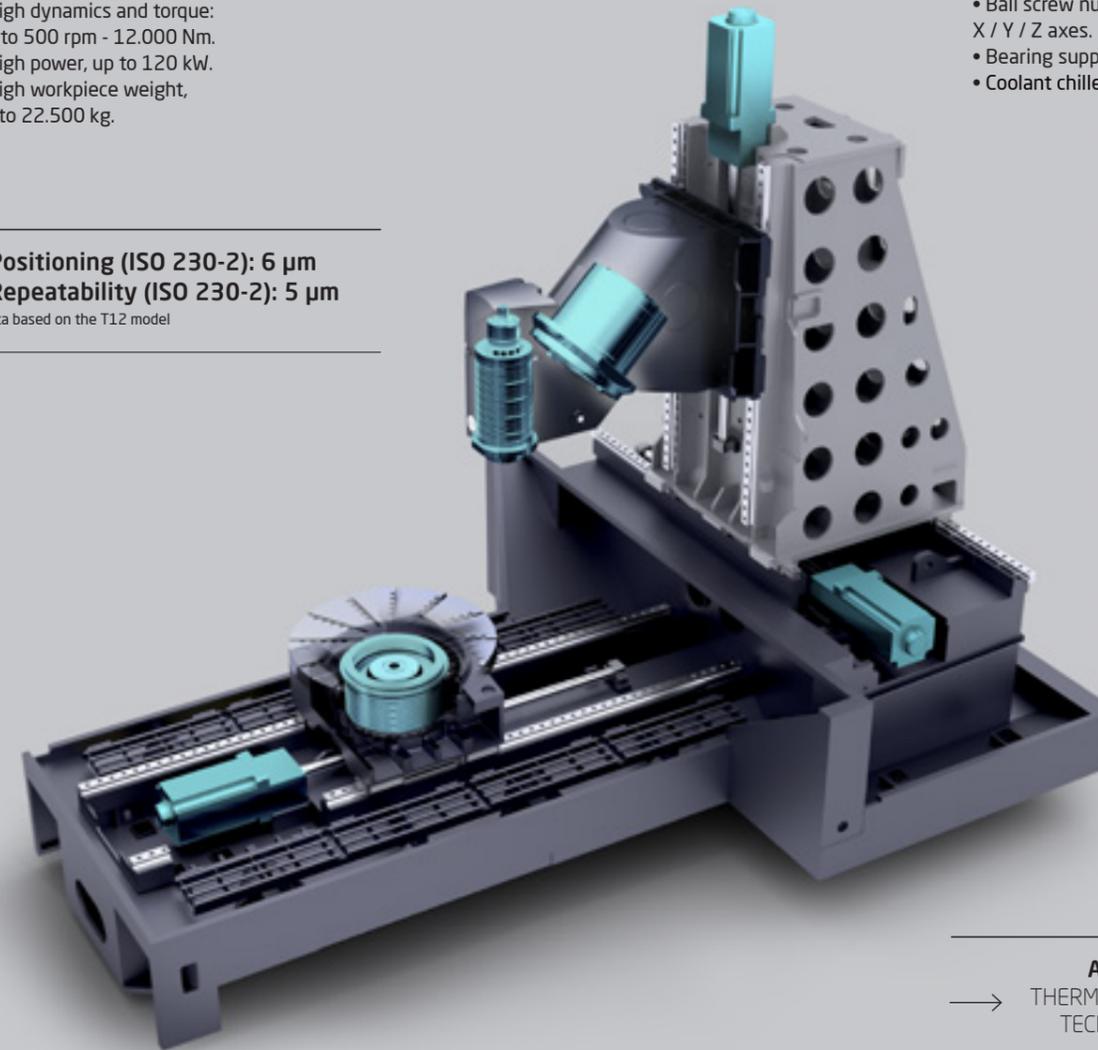

→ **ACTIVE THERMAL CONTROL TECHNOLOGY**

- [1\\_ General view](#)
- [2\\_ Application industries](#)
- [3\\_ Advantages](#)
- [4\\_ Characteristics](#)
- [4.2\\_ Eco & Ergo Design](#)
- [5\\_ Machine Configuration](#)
- [6\\_ The range](#)
- [7\\_ Technological integration](#)
- [8\\_ Technical data](#)

**IBARMIA ECO DESIGN**

Design by means of FEM method, oriented to the structural optimisation of the machine, which integrates various systems to reduce energy consumption:

- MQL lubrication avoiding pumps and their consumption
- Grease lubrication
- LED lighting
- More efficient servomotors

- Self-regulation of consumption by means of intelligent functions for automatic switch-on and switch-off of the machine.
- Technological cycles for more efficient performance.

20%


REDUCTION  
In environmental impact

**4\_ CHARACTERISTICS / EFFICIENCY**

**ECO & ERGO DESIGN**

Machines designed with the aim of optimising energy consumption throughout their life cycle; machines conceived for the highest efficiency in the machine-user relationship, which translates into improved accessibility and usability.

ECOLOGY AND ECONOMY CAN GO HAND-IN-HAND INTEGRATING "GREEN" PARAMETERS INTO THE MACHINE DESIGN PHASE AND IT'S FUTURE PERFORMANCE

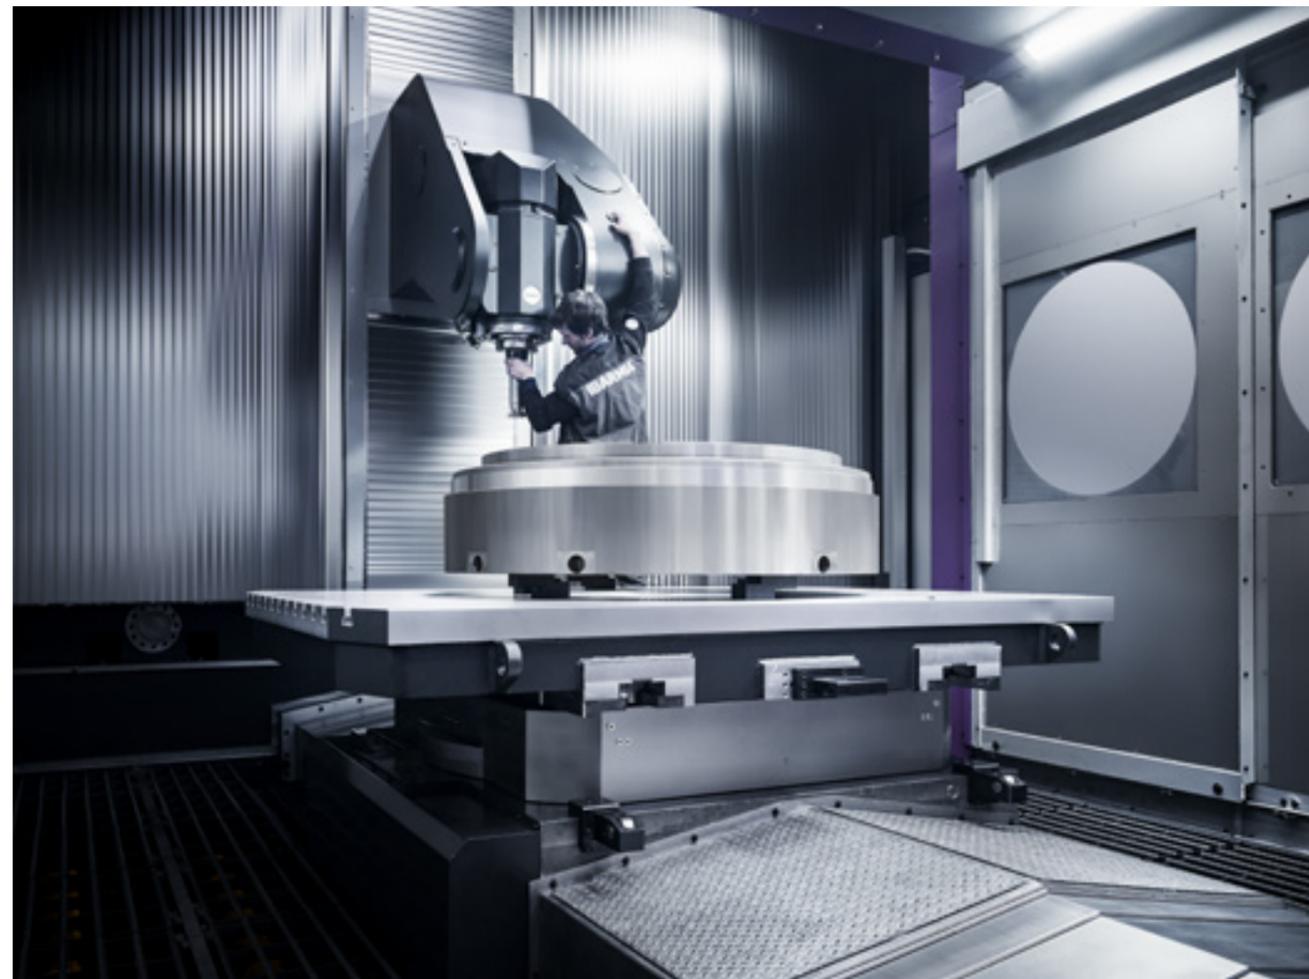

**IBARMIA ERGO DESIGN**

A machine designed for an optimum interaction with the operator.

- Motorised door opening to avoid physical efforts.
- Full and immediate access to a working area with folding slats in all the inside of the machine.
- Easy part loading-unloading and preparation. The operator can move around the table, making the access and cleaning of the endless screw area easier.

- Ergonomic working height optimized table height avoiding uncomfortable postures for the operator.
- An easy top access for loading / unloading parts by crane.
- Total closing of the workin area to reduce the acoustic and environmental contamination.
- Easy to identify and accessible control functions, to minimise mental fatigue of the operator.
- Light and moving control panel.

FULL ACCESS TO THE MACHINE BOTH IN MACHINING AS VERIFICATION AND MAINTENANCE OPERATIONS



- [1\\_ General view](#)
- [2\\_ Application industries](#)
- [3\\_ Advantages](#)
- [4\\_ Characteristics](#)
- [5\\_ Machine Configuration](#)
- [5.1\\_ Single table machine](#)
- [6\\_ The range](#)
- [7\\_ Technological integration](#)
- [8\\_ Technical data](#)

THE FLEXIBILITY OF THE T SERIES IS SUPPORTED BY 450 STANDARD OPTIONS. HOWEVER, SPECIAL OPTIONS ARE DEVELOPED ADHOC FOR THE SPECIFIC NEEDS OF CUSTOMERS



T SERIES

5.1\_ SINGLE TABLE MACHINE

SINGLE TABLE MACHINE CONFIGURATION

← 1\_ WORKING AREA



Parts up to  
h 1600 mm / 4.500 Kg  
Linear axes (mm)  
X 1200 Y 1300 Z 1000  
Axes can be increased up to  
Y +150 / 300 Z +200



Parts up to  
h 1700 mm / 6.000 Kg  
Linear axes (mm)  
X 1600 Y 1600 Z 1200  
Axes can be increased up to  
Y +150 / 300 Z +300



Parts up to  
h 1750 mm / 10.000 Kg  
Linear axes (mm)  
X 2200 Y 1600 Z 1500  
Axis can be increased up to  
Z +200



Parts up to  
h 1950 mm / 20.000 Kg  
Linear axes (mm)  
X 3000 Y 2000 Z 1700  
Axis can be increased up to  
Z +200



Parts up to  
h 2150 mm / 25.000 Kg  
Linear axes (mm)  
X 3600 Y 2300 Z 1900

2\_ TILTING HEADS



THC\_ B axis head  
-15°/+195°  
Overhanging can be increased up to 125 mm



THR\_ A axis head  
-45°/+135°  
Overhanging can be increased up to 125 mm

3\_ ROTARY TABLES



MULTIPROCESS  
Milling-Turnin rotary table  
Direct Drive transmission



EXTREME  
Milling rotary table  
Direct Drive transmission



EXTREME  
Milling rotary table

4\_ TOOL & HEAD MANAGEMENT



Chain Linear ATC  
Modullar increasing.  
From 60 to 360 tools.  
Up to 600 mm / 30 kg.



Integrated Pick ups  
For special tools and heads.  
Configurable layout.




Compact Polar ATC  
Configurable layout.  
134 or 255 tools.



Large capacity Polar ATC  
Managed by arm robot.  
Configurable layout.  
Up to 400 tools.



Arm robots  
Two configurations for  
40 and 100 kg.

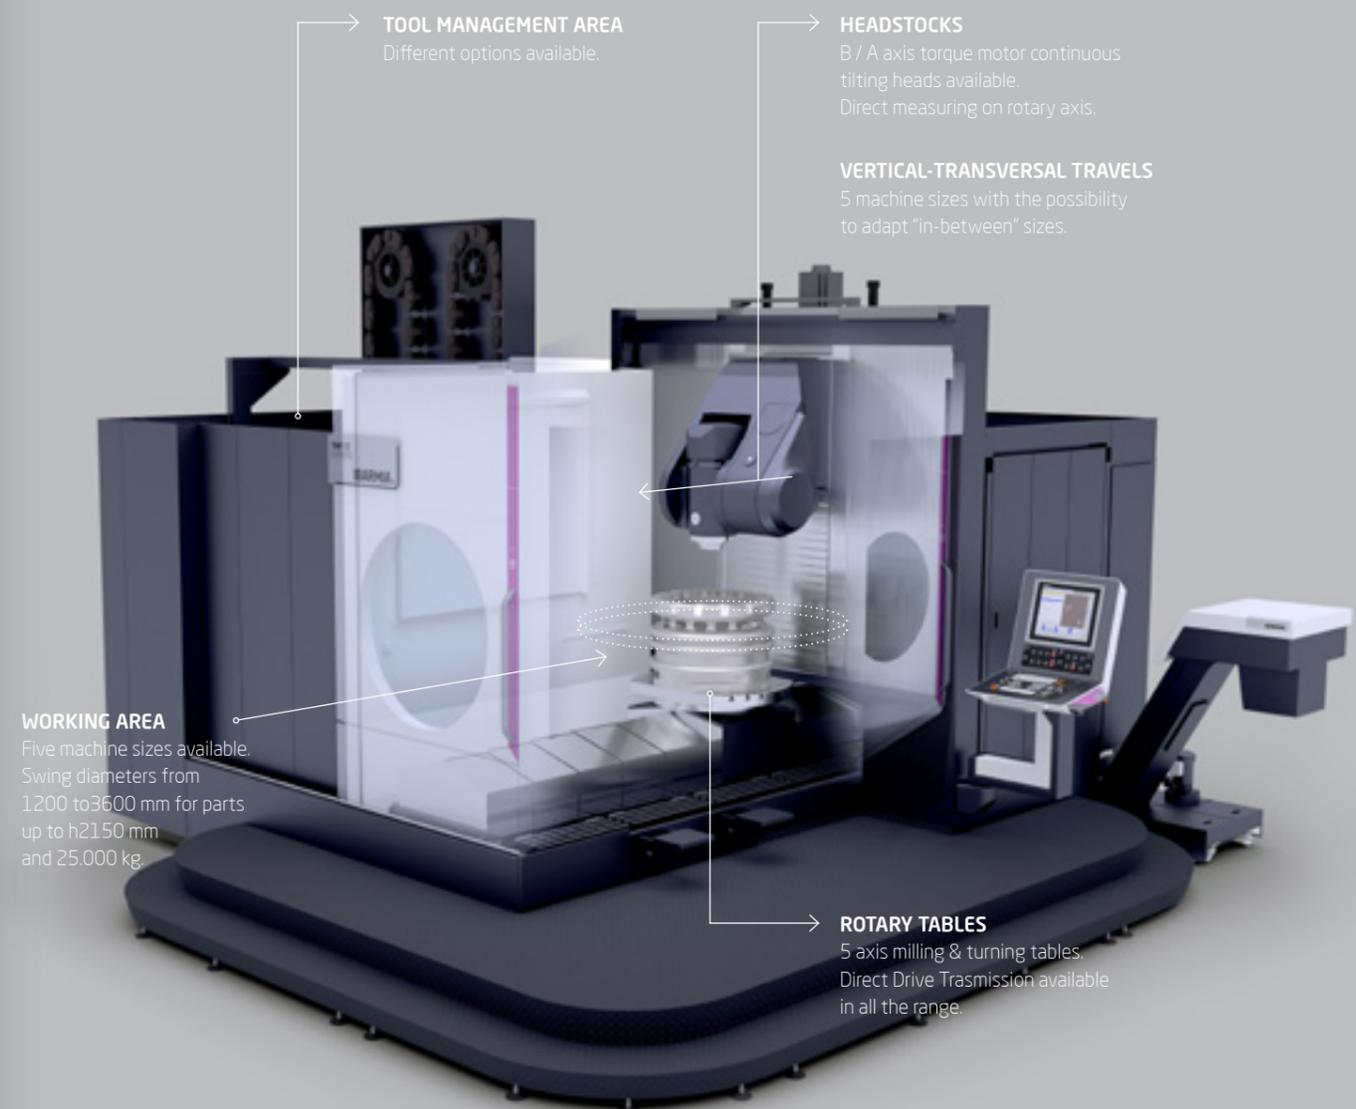

TOOL MANAGEMENT AREA  
Different options available.

HEADSTOCKS  
B / A axis torque motor continuous tilting heads available.  
Direct measuring on rotary axis.

VERTICAL-TRANSVERSAL TRAVELS  
5 machine sizes with the possibility to adapt "in-between" sizes.

WORKING AREA  
Five machine sizes available.  
Swing diameters from 1200 to 3600 mm for parts up to h2150 mm and 25.000 kg.

ROTARY TABLES  
5 axis milling & turning tables.  
Direct Drive Transmission available in all the range.

T MACHINES BASIC STRUCTURE  
(IN THE PICTURE THR 12 MODEL)

- 1\_ General view
- 2\_ Application industries
- 3\_ Advantages
- 4\_ Characteristics
- 5\_ Machine Configuration
- 5.2\_ Machine with pallet changing
- 6\_ The range
- 7\_ Technological integration
- 8\_ Technical data




## 5.2\_ MACHINE WITH PALLET CHANGING

### AUTOMATIC PALLET CHANGER CONFIGURATION

Starting from the basic configuration of the machine, IBARMIA offers different pallet changing solutions to increase productivity and minimise production and market response times.

THE FLEXIBLE MANUFACTURING SYSTEMS RESPOND TO SINGLE UNIT AND LARGE SERIES MANUFACTURING, MAKING THEM ATTRACTIVE TO COMPANIES OF EVERY SIZE AND SECTOR

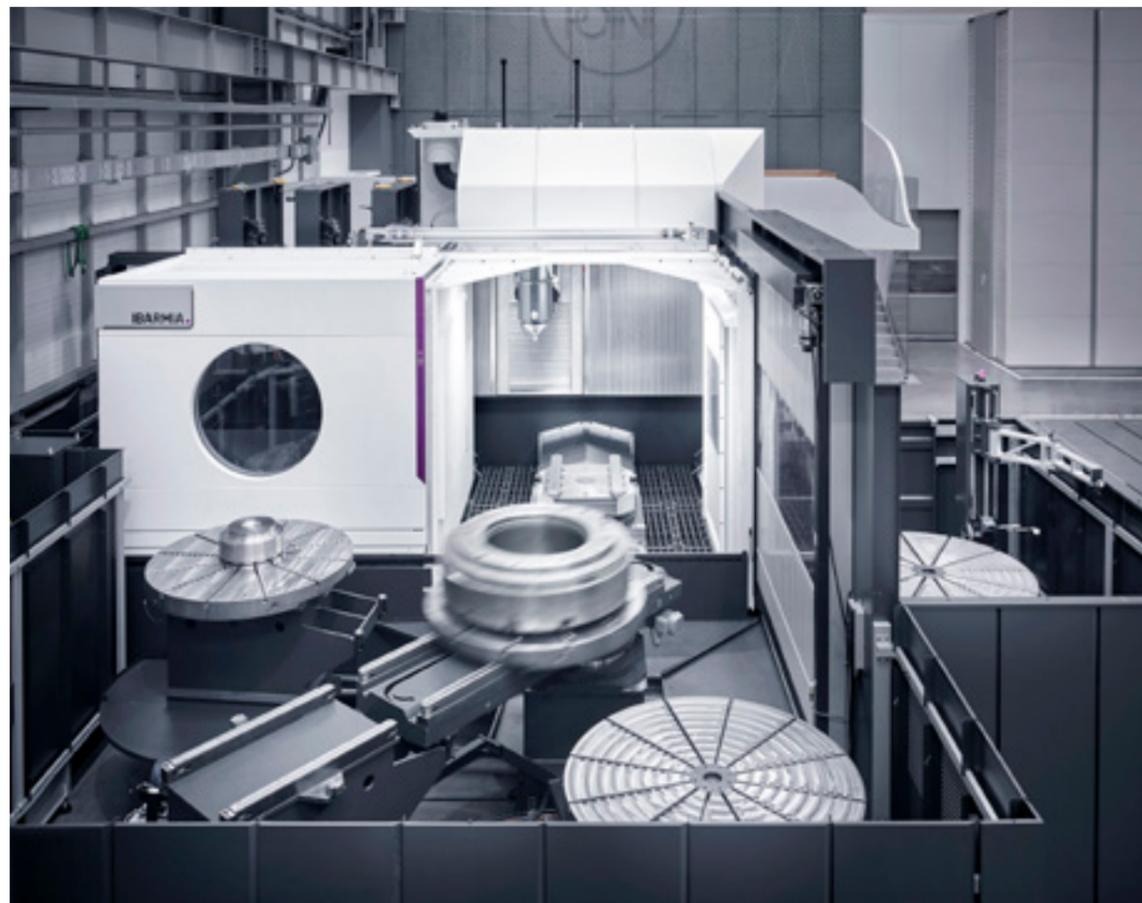

T SERIES



Automation is one of the big drivers of the current industry, due to the capacity to answer the challenge of making the machines work for as many hours as possible, or even unattended.

## SYSTEM 1

### ROTOPALLET\_ T12 / T16 MODELS

Quick pallet changing executed by a double fork located in the machine front.

The rotopallet is a system focused to increase the machine autonomy and productivity minimizing the floor space. The operator prepares the next job during the machining process. Optionally the loading / unloading position can turn manually 4x90° for a better access to the workpiece.

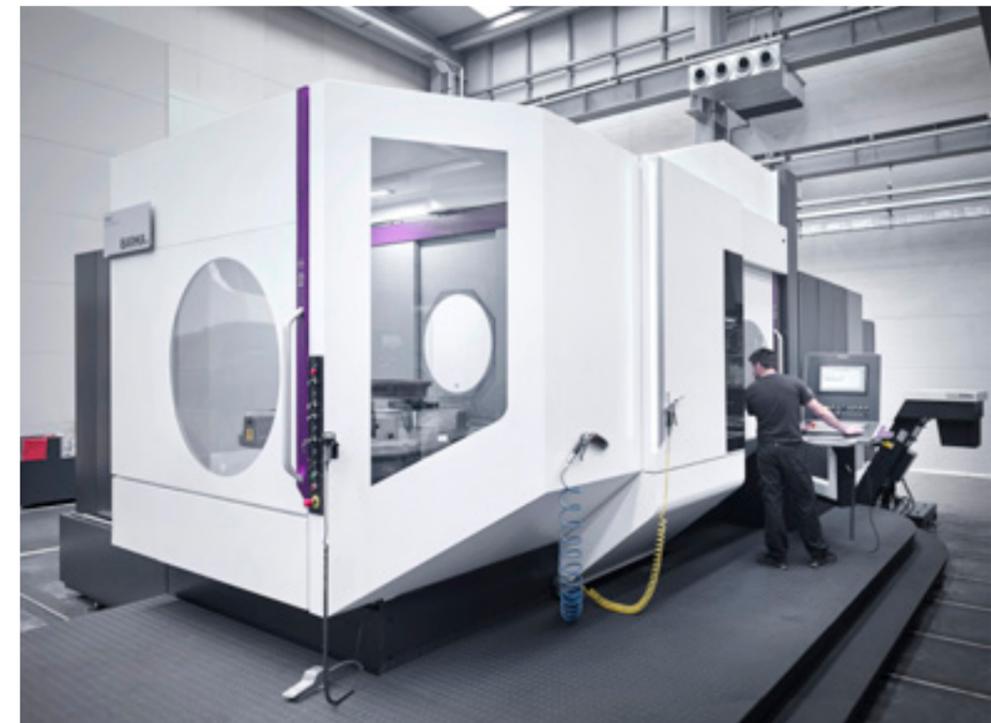

- 1\_ General view
- 2\_ Application industries
- 3\_ Advantages
- 4\_ Characteristics
- 5\_ Machine Configuration
- 5.2\_ Machine with pallet changing
- 6\_ The range
- 7\_ Technological integration
- 8\_ Technical data




SYSTEM 2

PALLET POOL\_  
T12 / T16 MODELS

Standardized and competitive solutions cooperating with leaders in the sector.

Integrating a flexible pallet warehouse in combination with one or more T12 or T16 machining centers, these facilities offer a great storage capacity with the minimum floor space. The basic installation can be extended with additional pallets. To add flexibility to the proposal, IBARMIA offers various solutions:

- 4 x 90° Manual indexing loading/unloading station.
- Automatic indexing loading/unloading station.
- Additional stations for piece inspection, turn-over, welding etc...

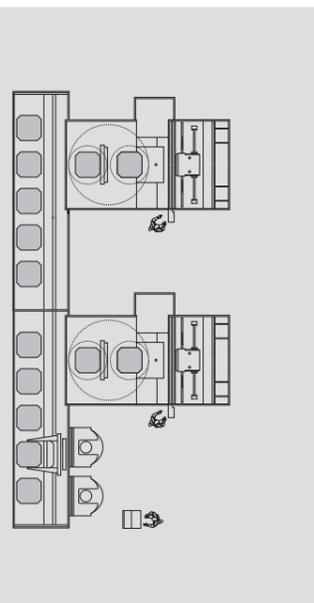


SYSTEM 3

PALLET POOL\_  
T22 / T30 / T36 MODELS

Due to heavier loads and bigger swing diameters, the automation system in the T22, T30 and T36 models requires different solutions than the T12 and T16 models.

The key factors to determine the number of pallets are the average cycle time of the pieces and the length of unattended use of the machine. IBARMIA offers simple modular solutions of 2 and 4 positions for the T22 / T30 / T36 models. Projects requiring a larger number of pallets can have linear storage with capacity for future growth, either for station units and/or machining units.

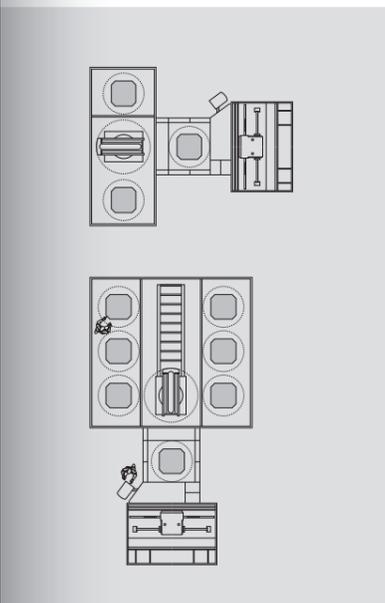


Therefore, the focus on improving productivity is permanent, minimising the production times and response to the market.

- [1\\_ General view](#)
- [2\\_ Application industries](#)
- [3\\_ Advantages](#)
- [4\\_ Characteristics](#)
- [5\\_ Machine Configuration](#)
- [5.3\\_ Machine equipment summary](#)
- [6\\_ The range](#)
- [7\\_ Technological integration](#)
- [8\\_ Technical data](#)

### 5.3\_ MACHINE EQUIPMENT SUMMARY

## THE STANDARD MACHINE MAIN CHARACTERISTICS


A high level of standard equipment makes these models focused on high productivity in advanced manufacturing a reference in terms of ergonomics and performance.



Stairs for an easy access to the working area.



Totally encapsulated working area and safety windows.



Illuminated working area. Working area without horizontal planes and smooth top.



Standard convertible roof facilitating the loading/unloading of pieces by crane.



Moving control panel with 19" touch screen.



60 positions chain driven tool magazine with servomotors.



Station for agile manual feeding of tools to the magazine.



Chip conveyor with integrated coolant tank.



Climatized electric cabinet with easy access, isolated from heat-sources.



External coolant system around the spindle.

Subject to change without prior motive. Informative contents are not binding.



T SERIES

- Other standard items**
- Travelling on lineal guides and ball screws.
  - Direct measuring on X / Y / Z axes.
  - Measuring by rotary scale on B axis and C axis.
  - Hydraulic counterweight for the head.
  - Servomotors with braking system for the axes.
  - Longitudinal endless screws for chip evacuation.



THC\_ B axis head  
Maintain the same tool center point across the full range



THR\_ A axis head  
Fork type spindle head ideal for negative angles

- DIRECT DRIVE TRANSMISSION B or A AXIS HEADS\_**
- TORQUE MOTOR technology.
  - Fast continuous and accurate movements.
  - Measured by rotary scale.
  - Backlash free.
  - Extraordinary precision.
  - Maintenance reduction.


- Positioning accuracy: 10"
- Turning torque S1: 1210 Nm
- Turning torque peak value: 2120 Nm
- Clamping force: 7000 Nm



**MULTIPLE CNC CONTROL PLATFORM IN ALL MODELS\_**

Latest generations of CNC controls of the most prestigious manufacturers. Freedom to choose among these user platforms.

HEIDENHAIN  
FANUC  
SIEMENS

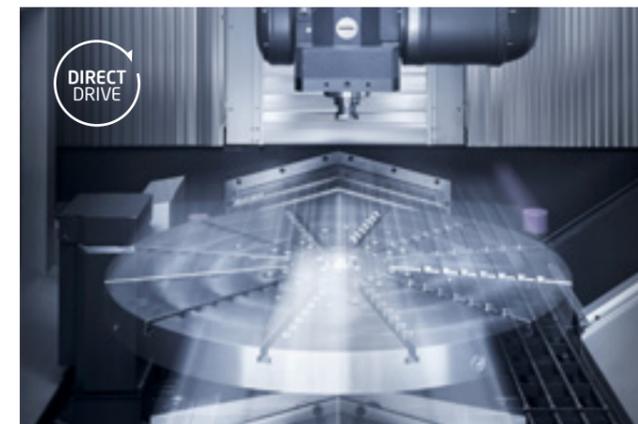

**DIRECT DRIVE TRANSMISSION WORKING ROTARY TABLES\_**

- TORQUE MOTOR technology.
- Maximum dynamics in turning operations and positioning accuracy in milling operations, without the need for additional mechanical devices or the use of position locking.

- Max speed up to 500 rpm
- Nominal torque up to 12.000 Nm
- Max power up to 120 kW
- Max load up to 22.500 kg

- [1\\_ General view](#)
- [2\\_ Application industries](#)
- [3\\_ Advantages](#)
- [4\\_ Characteristics](#)
- [5\\_ Machine Configuration](#)
- [5.3\\_ Machine equipment summary](#)
- [6\\_ The range](#)
- [7\\_ Technological integration](#)
- [8\\_ Technical data](#)

**5.3\_ MACHINE EQUIPMENT SUMMARY**

**OPTIONAL ITEMS SUMMARY TO COMPLETE THE RANGE VIEW**


The FLEXIBILITY of T SERIES machines is supported by 450 Standard options. However, Special options are developed ad-hoc for the specific needs of our costumers.



120-240-360 positions chain driven tool magazine with servomotors.



134 or 255 positions compact polar tool magazines.

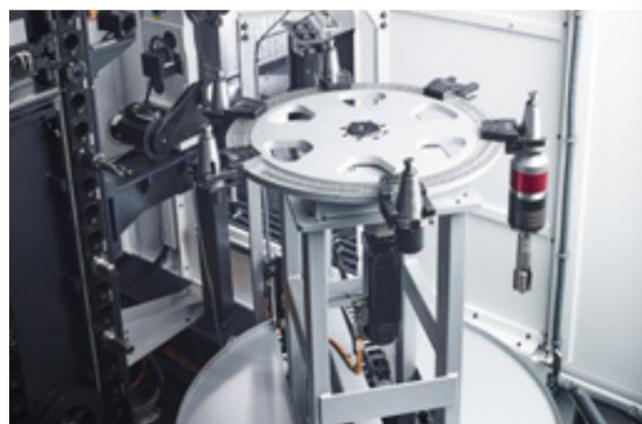

**INTEGRATED PICK UPS**  
For the management of long and/or heavy tools, which offer an ergonomic and simple compact solution to expand the range of available tools.



**LARGE CAPACITY POLAR TOOL MAGAZINES**  
Managed by arm robot, combining tool changing with special tools and heads changing.




**T SERIES**

- Other optional items**
- Coolant through spindle.
  - Steam and mist aspiration system.
  - "Illumination" pack with LED lights with acoustic signal indicating the state of the machine, integrated into the machine fairing.
  - Lights with acoustic signal indicating the machine status.
  - Camera settings and display mode.
  - Control with touch screen up to 24"



**MACHINE PRESETTING DEVICES**  
The program offers the possibility of add a wide range of tool measuring and touch systems integrated in the machine.

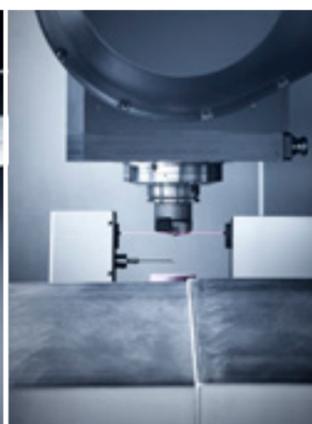

**VARIOUS AUTOMATIC PALLET CHANGING SYSTEMS AVAILABLE**  
IBARMIA offers different degrees of automatic pallet changers for a perfect adaptation to specific production requirements.



**PRECISION PLUS PERFORMANCE CONCEPT**  
Optional machine manufacturing measures. / Integral cooling measures for improving the machine thermal behaviour.

MACHINE THERMAL BEHAVIOUR IMPROVING



**A WIDE RANGE OF ELECTROSPINDLES AVAILABLE**  
The program offers a large variety of spindles available, to cover from high dynamics machinings to works on the hardest materials by high torque spindles.

DIGITAL TECHNOLOGY ELECTROSPINDLES

- 1\_ General view
- 2\_ Application industries
- 3\_ Advantages
- 4\_ Characteristics
- 5\_ Machine Configuration
- 6\_ The range
- 6.1\_ T MULTIPROCESS
- 7\_ Technological integration
- 8\_ Technical data

AT THE FOREFRONT OF TECHNOLOGY, MULTIPROCESS MACHINES REDUCE TIME AND ERRORS WHILE INCREASING PRODUCTIVITY CONSIDERABLY

6.1\_ T MULTIPROCESS MACHINES

**T MULTIPROCESS**  
5 AXIS UNIVERSAL MULTITASKING MACHINING CENTERS


The MULTIPROCESS concept improves the quality of the parts by using fewer machines and therefore fewer set-ups, reducing the initial investment cost by requiring fewer machines with a smaller footprint, and simplifying industrial management by eliminating the transit of parts between machines.

- 5 Axis Milling
- Turning
- Mill-turning
- Drilling
- Threading
- Boring
- U axis boring
- Grinding
- Gear power skiving
- Gear hobbing



The classic machining process requires 3 machines and 10 machining steps, while using MULTIPROCESS technology reduces the process to a single machine and 4 machining steps, resulting in a 300% increase in productivity.

**300%**  
Productivity improve

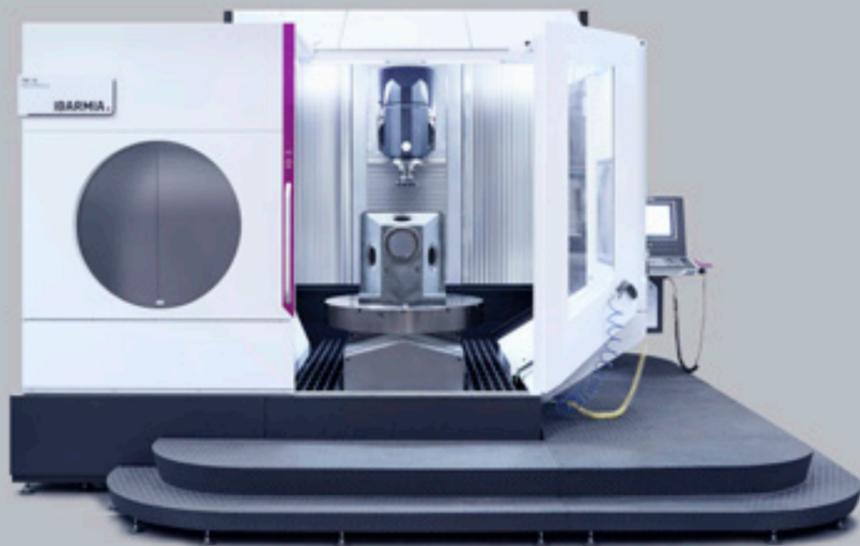

MANUFACTURING TECHNOLOGY



Table diameter  
ø1000 mm  
Maximum turning speed  
500 rpm  
Maximum load capacity\*  
2250 kg / 4500 Kg



Table diameter  
ø1200 mm  
Maximum turning speed  
500 rpm  
Maximum load capacity\*  
3000 kg / 6000 Kg



Table diameter  
ø1600 mm  
Maximum turning speed  
400 rpm  
Maximum load capacity\*  
6000 kg / 10.000 Kg

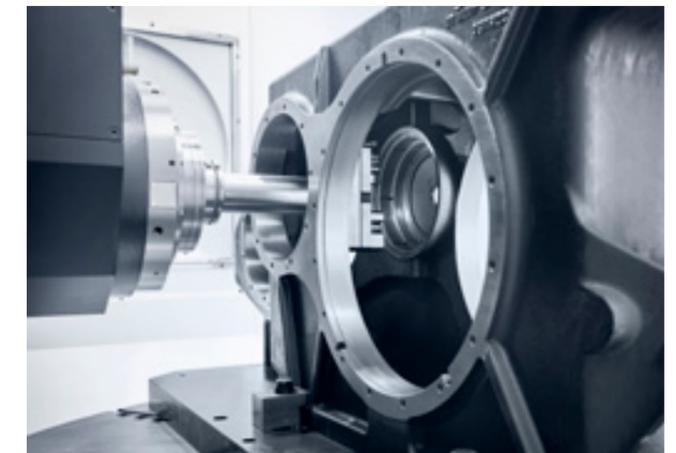



Table diameter  
ø1800 mm  
Maximum turning speed  
200 rpm  
Maximum load capacity\*  
14.000 kg / 20.000 Kg




Table diameter  
ø2000 mm  
Maximum turning speed  
150 rpm  
Maximum load capacity\*  
16.000 kg / 22.500 Kg

\*Turning / Milling



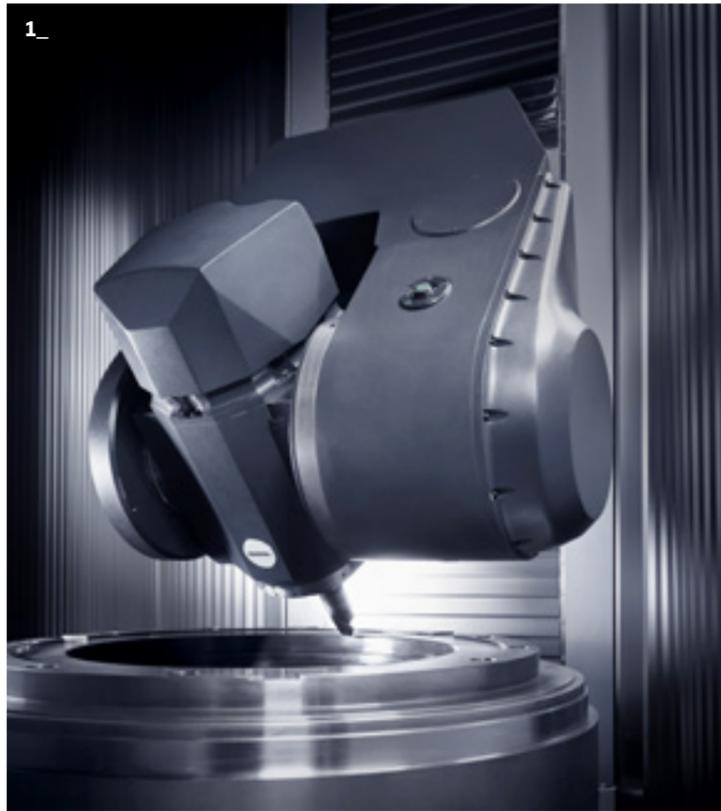


1\_ THR 30 MULTIPROCESS:  
Model equipped with an A-axis  
THR spindle head for machining  
negative angles (+45° / -135°).  
With a maximum swing diameter  
of 3000 mm, it allows turning  
operations at a maximum of  
200 rpm on workpieces up to 14t.

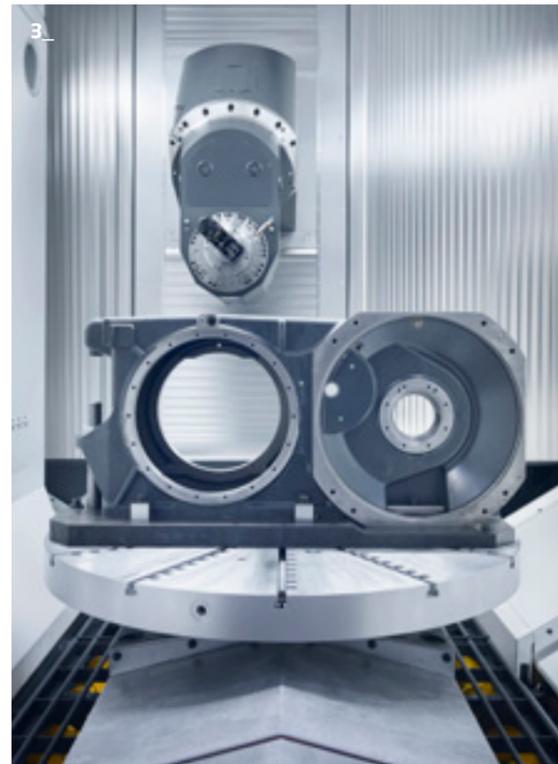


3\_ THR 16 MULTIPROCESS  
with universal B-axis head  
(-15°/+195°). This multitasking  
machining centre has been  
adapted to the customer's needs,  
having increased the vertical  
travel by 300 mm, and is intended  
for the manufacture of different  
parts for the automotive sector.



4\_ THR 12 MULTIPROCESS  
equipped with Rotopallet for  
the maintenance of metro-train  
wheels Top of the range among  
models with pallet changing (see  
page 19), this system increases  
the production and autonomy of  
the machine while minimising its  
occupation in plant.

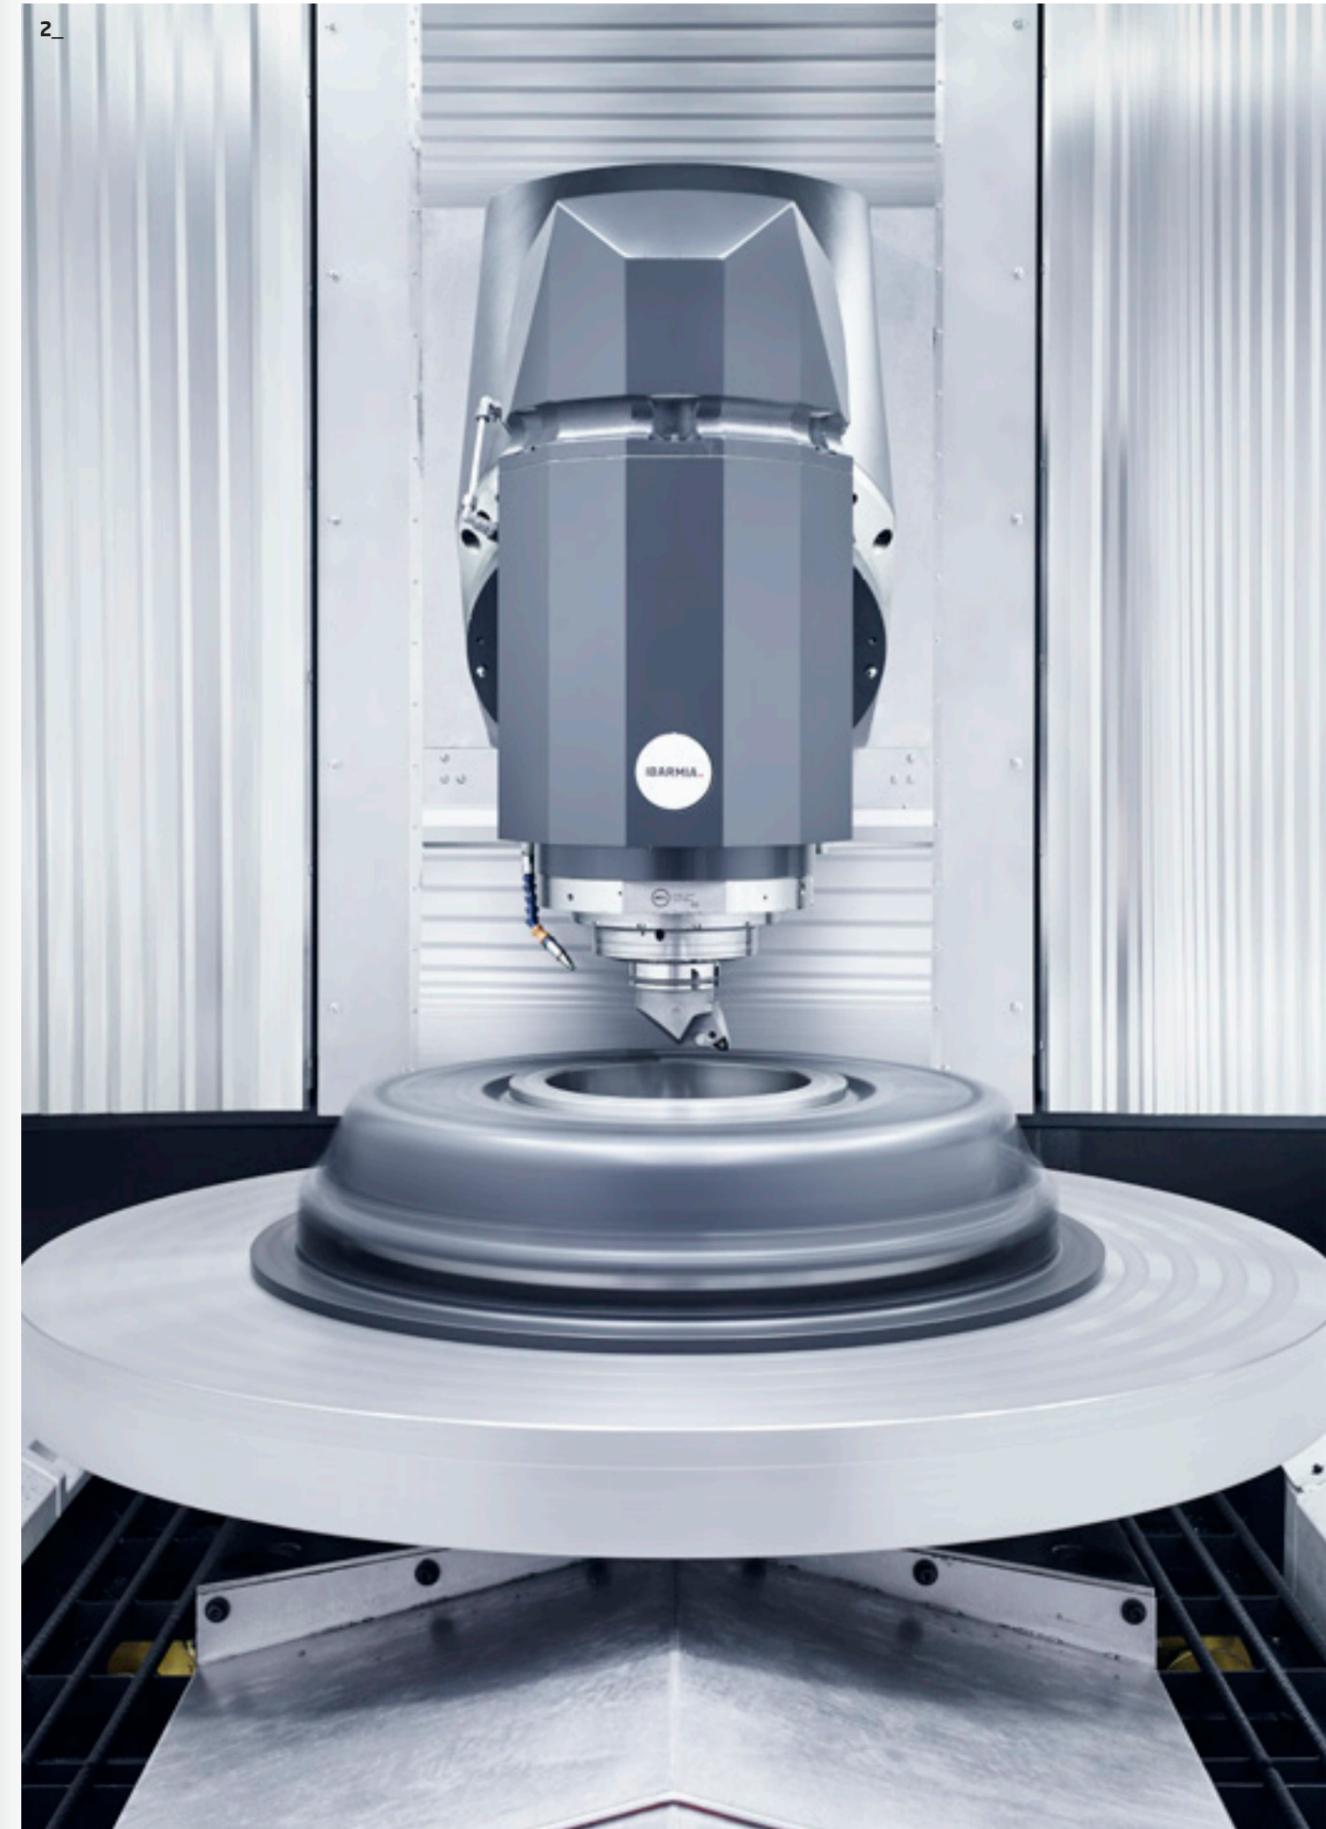

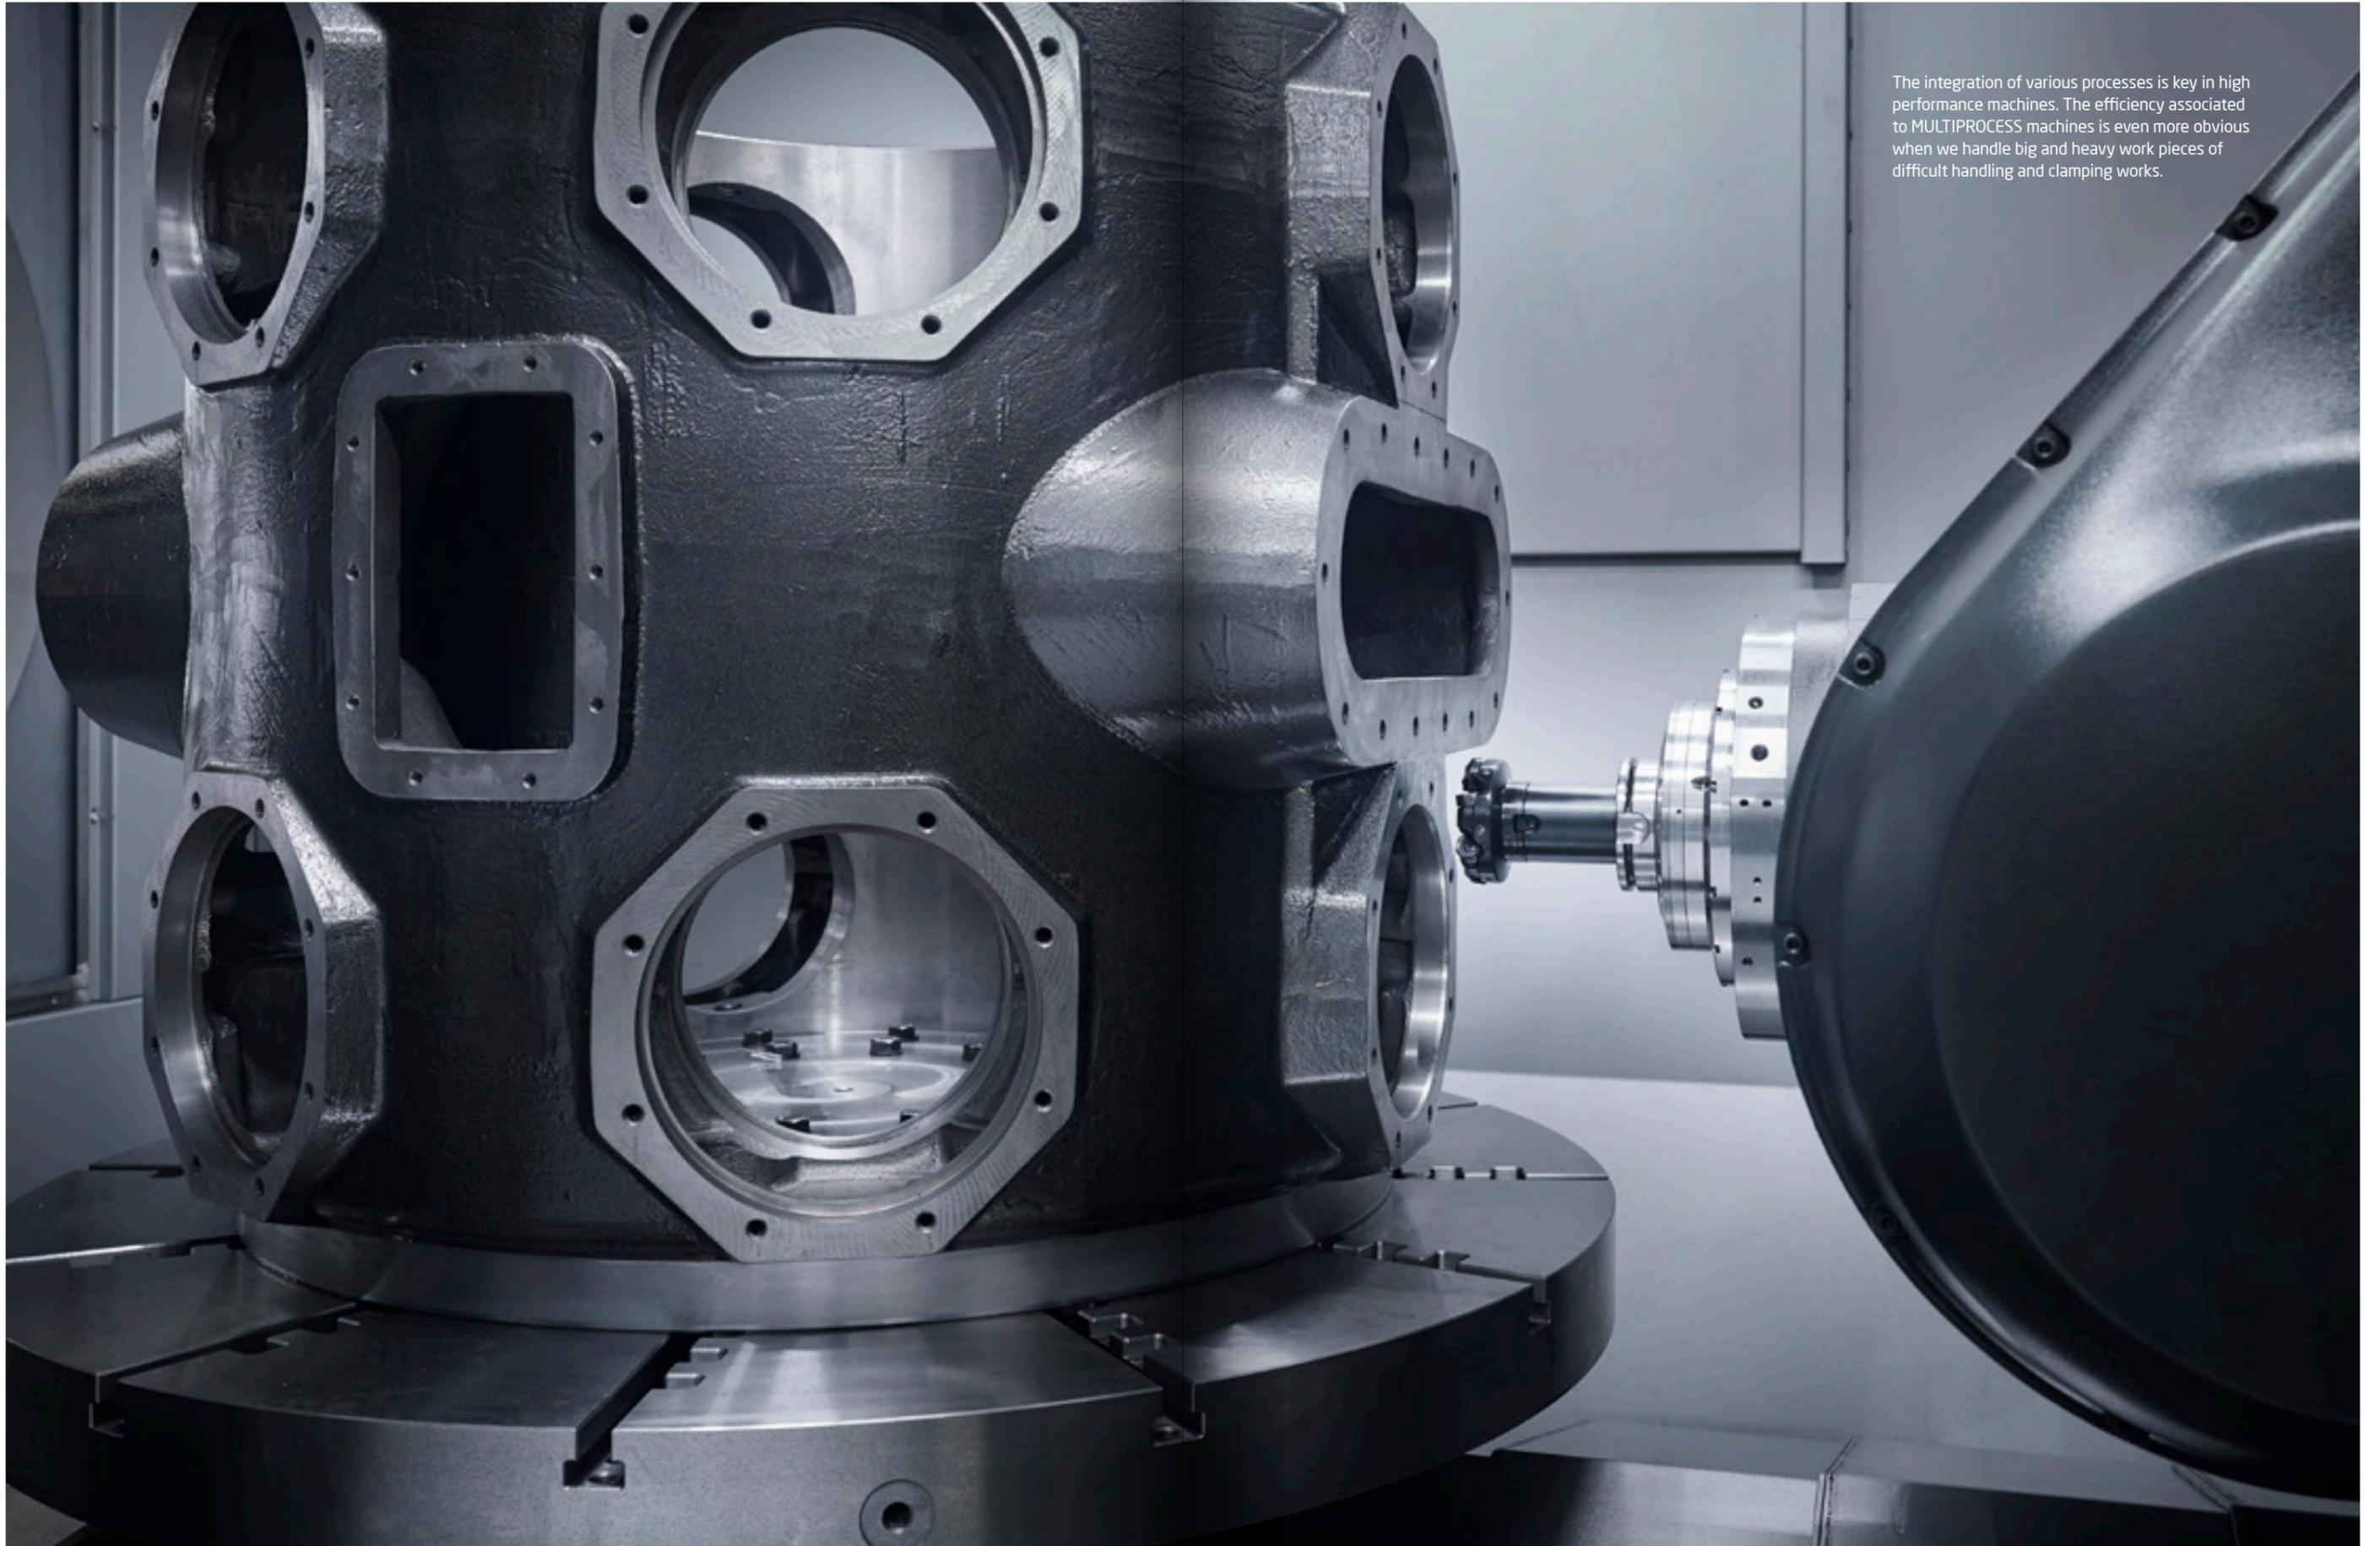

The integration of various processes is key in high performance machines. The efficiency associated to MULTIPROCESS machines is even more obvious when we handle big and heavy work pieces of difficult handling and clamping works.

- 1\_ General view
- 2\_ Application industries
- 3\_ Advantages
- 4\_ Characteristics
- 5\_ Machine Configuration
- 6\_ The range
- 6.2\_ T EXTREME
- 7\_ Technological integration
- 8\_ Technical data

THE PERFECT SOLUTION FOR ADVANCED MACHINING OF MEDIUM TO LARGE WORKPIECES IN ONE SET UP

6.2\_ T EXTREME MACHINES

**T EXTREME**  
5 AXIS UNIVERSAL MACHINING CENTERS


The efficiency associated with the multi-axis models is of great importance in the T Series machining centres, as they allow machining in a single set-up on 5 faces and inclined planes, large volume parts whose handling and clamping are very demanding, thus avoiding unproductive set-ups to the benefit of the final precision and quality of the workpieces.

- Max feed on X, Y, Z axes, up to 60 m/min
- Accelerations up to 5 m/s<sup>2</sup>
- Tool change time "chip to chip" up to 7s\*

\*Data based on the T12 model

- 
- 5 Axis Milling
  - Drilling
  - Threading
  - Boring
  - U axis boring
  - Grinding
  - Gear hobbing

The ability to tackle a wide range of machining operations in a single set-up, combined with the high dynamics of the linear axes of these models, leads to a significant reduction in manufacturing times, a vital aspect in many sectors where the every-second saving provided by the high speed of vacuum movements is a key competitive factor.

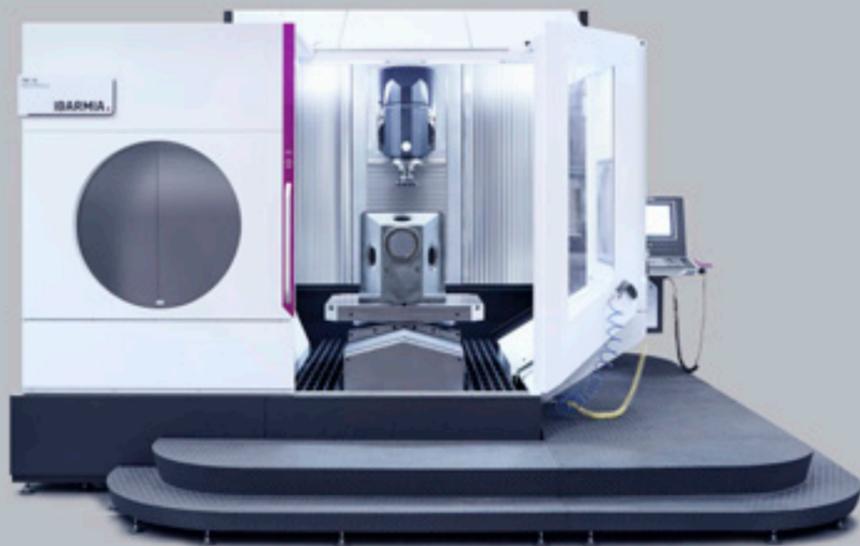

GLOBAL MACHINE DYNAMIC IMPROVEMENT IN X, Y, Z, LINEAR AXES IN T12 & T16 MODELS

**60%**

Average increase in Acceleration and Speeds



MANUFACTURING TECHNOLOGY



Table size  
**800 x 800 mm**  
Maximum load capacity  
**4500 Kg**  
Maximum turning speed  
**50 rpm**



Table size  
**1000 x 1000 mm**  
Maximum load capacity  
**6000 Kg**  
Maximum turning speed  
**40 rpm**



Table size  
**1250 x 1250 mm**  
Maximum load capacity  
**10.000 Kg**



Table size  
**1250 x 1600 mm**  
Maximum load capacity  
**20.000 Kg**



Table size  
**1.600 x 1.600 mm**  
Maximum load capacity  
**25.000 Kg**

→ HIGH PRODUCTIVITY OF MEDIUM DIAMETER PARTS

→ HIGH PRODUCTIVITY OF BIG DIAMETER PARTS



**High Dynamics T12 & T16 EXTREME Models**


IBARMIA'S T12 and T16 models combine high linear axis dynamics with the integration of DIRECT DRIVE technology on the positioning tables.

- Torque motor DIRECT DRIVE transmission positioning working tables.
- HIGH DYNAMICS technology.







1\_ Above, pallet pool with four stations on a THC 30 EXTREME (model with up to  $\varnothing 3000$  mm turning capacity on parts up to h1950 mm and 20t). These rotary stations for loading and unloading parts while the machine is working (2 and 3) eliminate the downtime caused by complex preparations on this type of large-volume parts (see page 21).

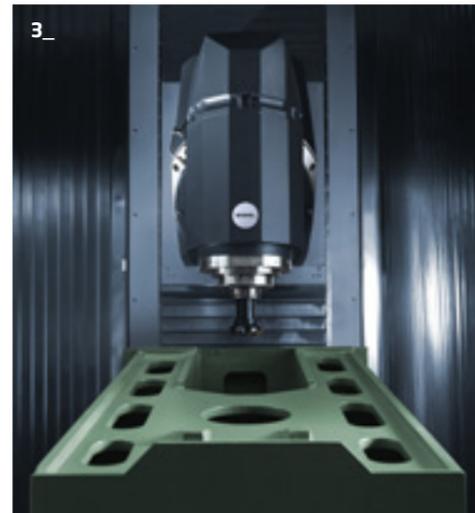

4\_ Working area of a THC 16 EXTREME showing the movement of the table combining the transversal movement of the Y-axis with the C-axis rotation of the table. The double endless screw system for chip evacuation on each side of the table can be seen through a slat system that allows the operator to move freely around the table.

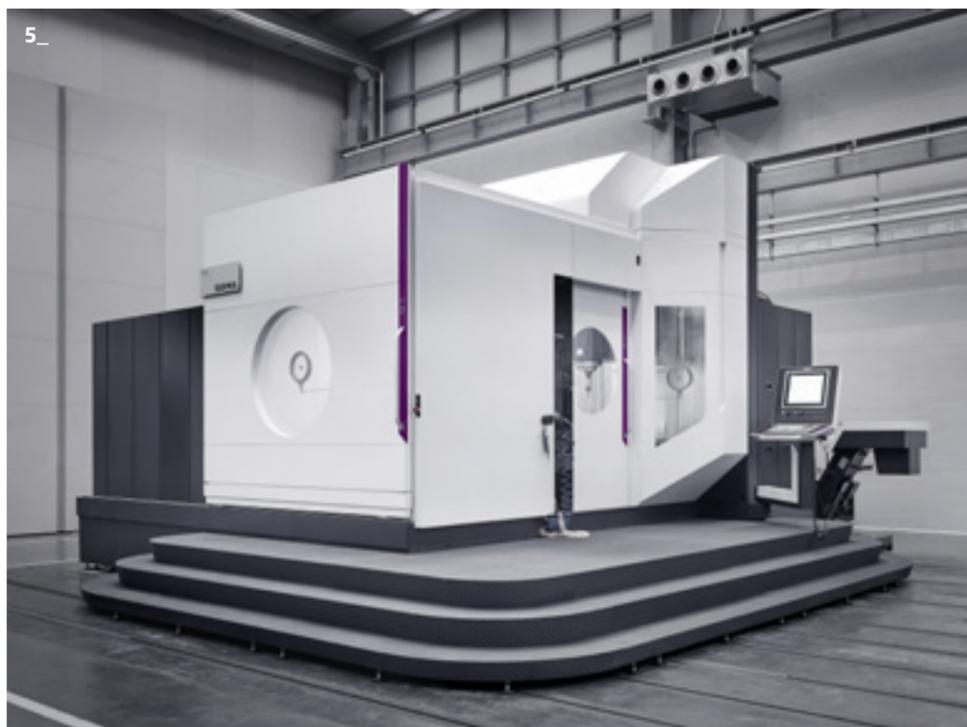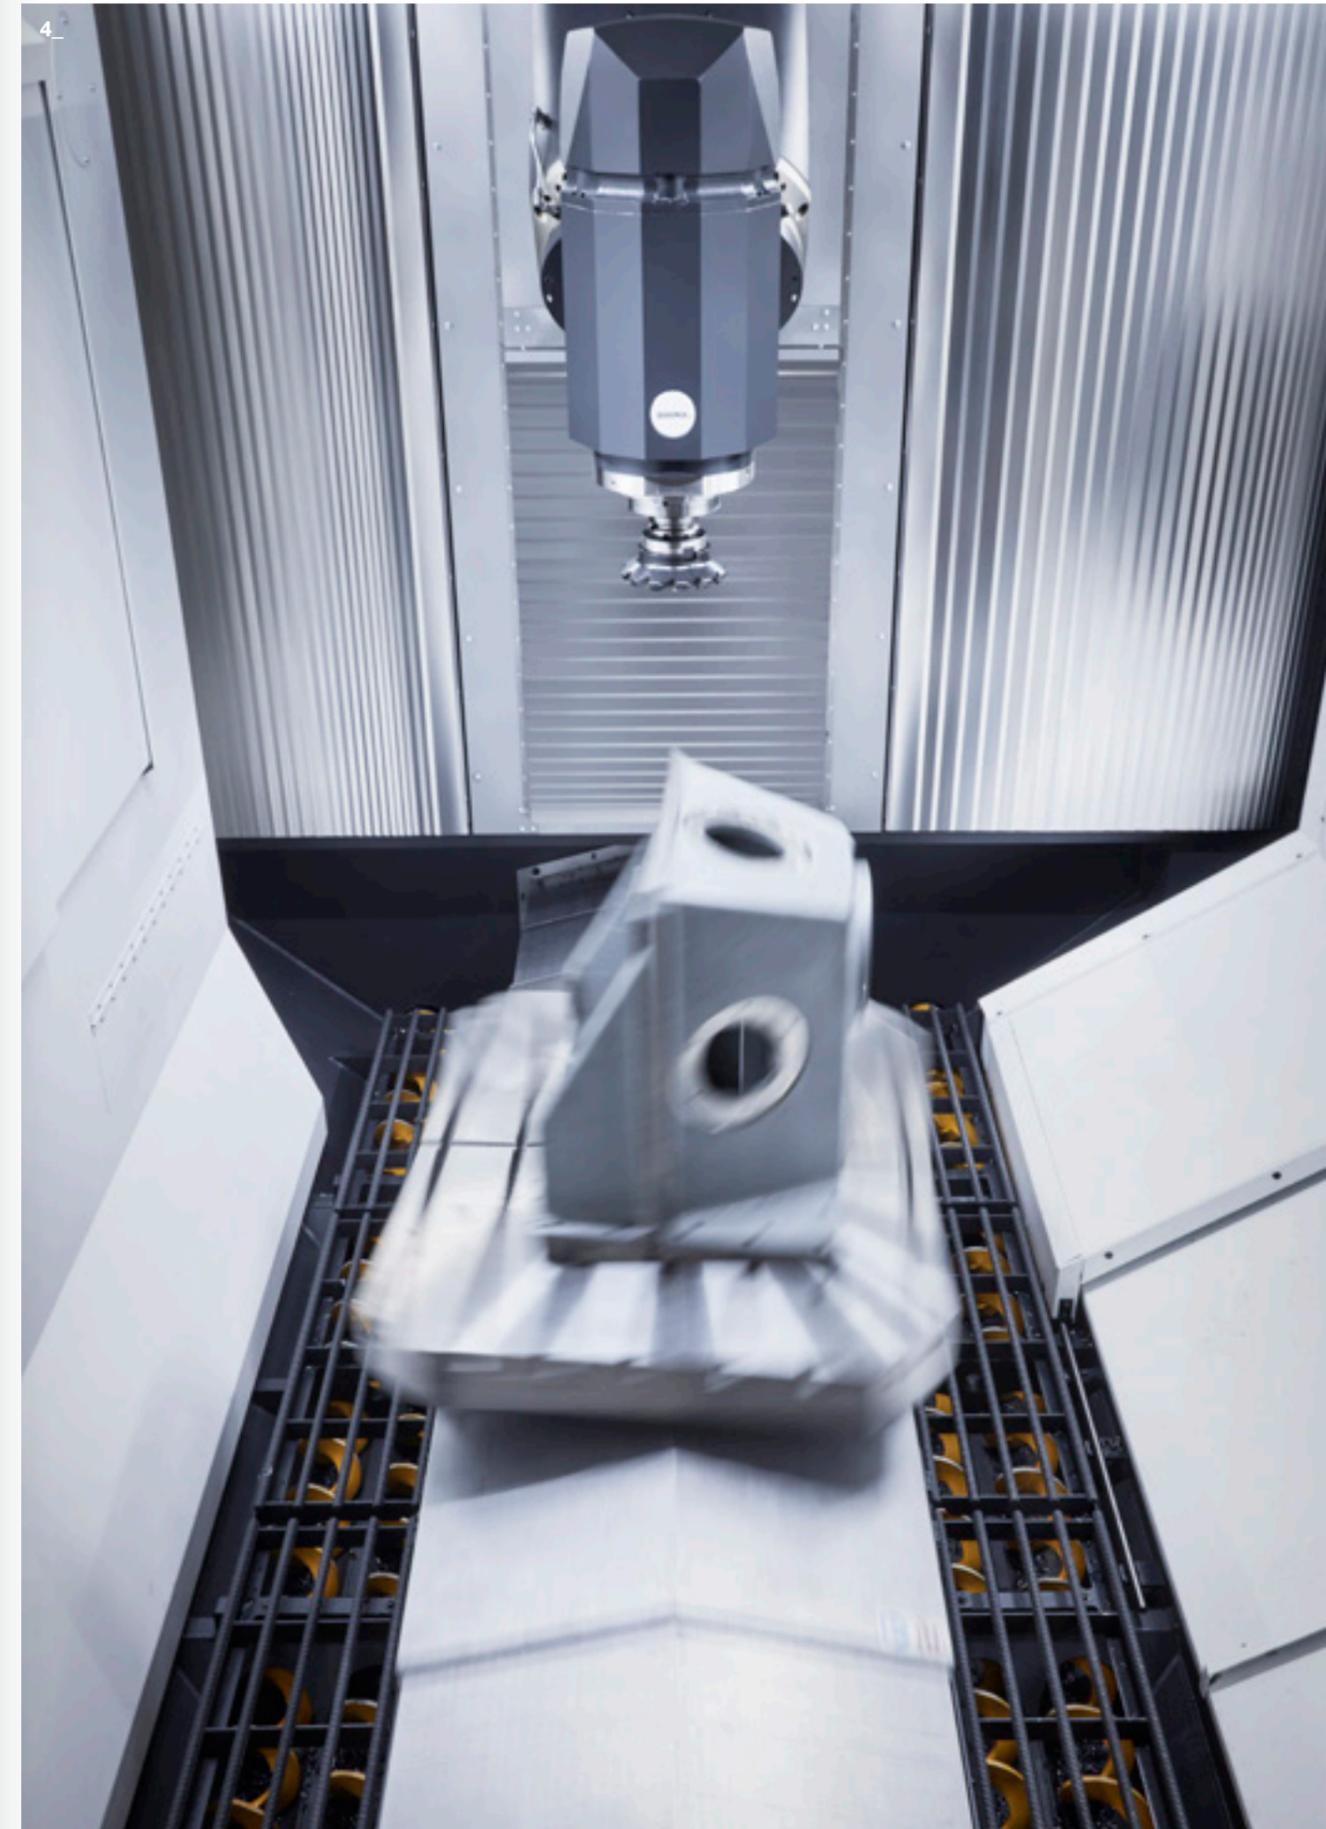

5\_ THC 22 EXTREME with the working area completely encapsulated and accessible from the front and lateral sides of the machine. The stepped platform, which is standard for the 12, 16 and 22 models, allows convenient and immediate access to the machine. The T16 and T22 centres offer the option of plastering the machine, while in the case of the T30 and T36 the machine must be plastered without the access platform.

- [1\\_ General view](#)
- [2\\_ Application industries](#)
- [3\\_ Advantages](#)
- [4\\_ Characteristics](#)
- [5\\_ Machine Configuration](#)
- [6\\_ The range](#)
- [7\\_ Technological integration](#)
- [8\\_ Technical data](#)



## 7\_ TECHNOLOGICAL INTEGRATION

### ACTIVE ASSISTANCE TO THE MACHINING PROCESS

IBARMIA range of applications for active support in the manufacturing process, through connected machines equipped with the latest technology for the most demanding production needs.

#### Y-C AXIS AUTOTUNING

##### T MULTIPROCESS / T EXTREME




This applications are aimed to maximize the position loop bandwidth for variable moving masses placed on moving tables (Y axis) and rotary tables (C axis).

##### Main features Y axis autotuning:

- Automatic measurement of axis weight for every remarkable change in the mass on moving tables (Y) / Automatic measurement of axis inertia for every remarkable change in the mass on rotary tables (C).
- Automatic adjustment of speed and position control gains to maximise position loop bandwidth according to the specific values of mass, inertia ratios and natural frequencies in the feed drive.

##### Main features C axis autotuning:

- Automatic measurement of the axis inertia for every noticeable change in mass on rotary tables.
- Automatic calculation of natural frequencies and inertia ratios by means of motor consumption signals.
- Automatic limitation of maximum rotational speed of the rotary table depending on the workpiece weight, for axis protection.




## CONTROL CYCLES

### ELECTROSPINDLE PROTECTION

#### T MULTIPROCESS / T EXTREME

This smart equipment has been designed to detect, at a very early stage, abnormal situations and disturbances that may affect the lifetime of the main spindles, especially imbalanced tools, excessive vibration during machining and collisions among spindles and machined parts.

- Monitoring of spindle imbalance during idle conditions.
- Automatic stop of spindle feed axis in case of abnormal vibrations.
- Continuous diagnosis of spindle bearings condition for preventive maintenance purposes.





### RESIDUAL IMBALANCE CHECK

#### T MULTIPROCESS

Imbalance reduces the life of bearings and other components, produces noise and may be a safety risk; the Rotary Axes Imbalance Compensation (RAUC) increases the life and the safety of your machine.

- Static, coupled and dynamic imbalance detection.
- Mass distribution detection.
- Balancing masses weight and location suggestion for rotary tables.




## OPERATIONAL CYCLES

### MILLING-TURNING

#### T MULTIPROCESS

High productivity thanks to complete machining on one machine in a single setup.

- Cutting, undercutting, cutting chips, threading, etc.
- Imbalance calculation, control and monitoring.
- Storage, emission and transmission of measurement data.
- Turning of long tools in the workpiece.
- Use of multi-cutting tools.



### GRINDING


#### T MULTIPROCESS / T EXTREME

Grinding cycles for T SERIES machines.

- MULTIPROCESS models\_
- External cylindrical.
- Internal cylindrical.
- Flat surfaces with flat grinding wheel (tangential contact).
- EXTREME models\_
- Flat surfaces with flat grinding wheel (tangential contact).

##### Achievable tolerances:

- Surface quality down to 0,8 μm.
- Depending on the process.



Subject to change without prior motive. Informative contents are not binding.



## T SERIES

### GEAR SKIVING


#### T MULTIPROCESS

Synchronized rotation of tool and workpiece to be machined. Innovative manufacturing process for gears with straight or oblique gearing.

- For internal and external gearing.
- Shorter machining times.
- Fewer tools.

##### Achievable gear quality:

- Straight gear DIN 9 (roughing). (Depending on the gear module and diameter).
- Straight gear DIN 7 (finishing). (Depending on the gear module and diameter).



SK

### GEAR HOBBING


#### T MULTIPROCESS / T EXTREME

Maximum flexibility through production with standard tools on standard machines.

- Free modification of profiles, flanks and contact pattern.
- Flexible for different gears.
- Soft and hard machining on one machine.

##### Achievable gear quality:

- Straight gear DIN 9 (roughing). (Depending on the gear module and diameter).
- Straight gear DIN 7 (finishing). (Depending on the gear module and diameter).



HB


Subject to change without prior motive. Informative contents are not binding.

- [1\\_ General view](#)
- [2\\_ Application industries](#)
- [3\\_ Advantages](#)
- [4\\_ Characteristics](#)
- [5\\_ Machine Configuration](#)
- [6\\_ The range](#)
- [7\\_ Technological integration](#)
- [8\\_ Technical data](#)

8.1\_ DIGITAL TECHNOLOGY SPINDLES


SPINDLES\_ POWER DIAGRAMS

A range of spindles to cover all machining needs; Dynamics and high revolutions, and high torque from very low turns for the hardest materials.

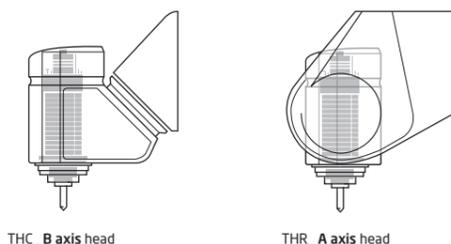


1\_ STANDARD

Power and dynamics\_  
Up to 12.000 rpm  
74/84 kW (S1/S6)  
300/452 Nm (S1/S6)

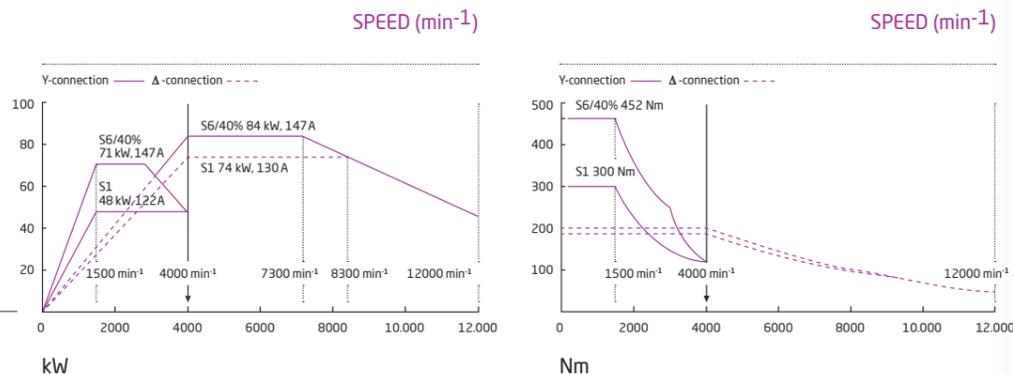

2\_ OPTIONAL

High torque for the hardest materials\_  
Up to 7000 rpm  
75 kW (S1/S6)  
550/650 Nm (S1/S6)

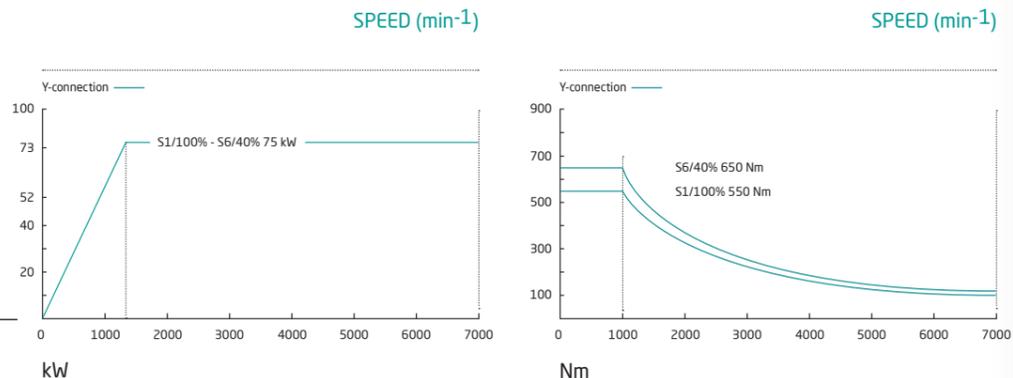


\*More spindles on request



T SERIES

8.2\_ MACHINING CAPACITY TEST

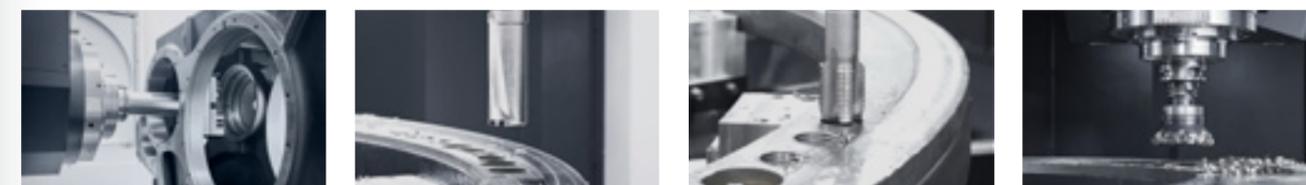

MILLING

VERTICAL DRILLING

VERTICAL TAPPING

MILLING OF NICKEL BASED SUPER ALLOY

BY USING THE STANDARD ELECTROSPINDLE\* IN Ck45 STEEL

- Available power: 48 kW**
- Material Removal rate: 1484 cm<sup>3</sup> / min
  - Working tool: High feed mill ø66 mm (Z4)
  - Spindle speed: 2115 rpm (Vc= 438 m/min)
  - Working feed: 21.000 mm/min (Fz= 2,48 mm)
  - Depth / Width of cut: ap= 1,5 mm / ae= 47 mm

\* High performance Milling

BY USING THE STANDARD ELECTROSPINDLE IN Ck45 STEEL

- Available power: 25 kW**
- Material Removal rate: 560 cm<sup>3</sup> / min
  - Working tool: Modular drill ø80 mm
  - Spindle speed: 796 rpm (Vc= 200 m/min)
  - Working feed: 111 mm/min (Fn= 0,14 mm)

BY USING THE STANDARD ELECTROSPINDLE IN Ck45 STEEL

- Available power: 2,7 kW**
- Working tool: Tap M45x4,5
  - Spindle speed: 85 rpm (Vc= 12 m/min)
  - Working feed: 385,5 mm/min (Fn= 4,5 mm)

BY USING THE STANDARD ELECTROSPINDLE IN INCONEL 625

- Available power: 74 kW**
- Material Removal rate: 930 cm<sup>3</sup> / min
  - Working tool: Mill ø50 mm (Z6)
  - Spindle speed: 4500 rpm (Vc= 700 m/min)
  - Working feed: 8100 mm/min (Fz= 0,3 mm)
  - Depth / Width of cut: ap= 3 mm / ae= 37 mm

BY USING THE OPTIONAL ELECTROSPINDLE\* IN HARDOX 500

- Available power: 18 kW**
- Material Removal rate: 158 cm<sup>3</sup> / min
  - Working tool: Long edge square shoulder milling ø80 mm (Z4)
  - Spindle speed: 350 rpm (Vc= 88 m/min)
  - Working feed: 350 mm/min (Fz= 0,25 mm)
  - Depth / Width of cut: ap= 45 mm / ae= 10 mm

\* Side Milling

BY USING THE OPTIONAL ELECTROSPINDLE IN HARDOX 500

- Available power: 26 kW**
- Material Removal rate: 560 cm<sup>3</sup> / min
  - Working tool: Modular drill ø35 mm
  - Spindle speed: 510 rpm (Vc= 56 m/min)
  - Working feed: 165 mm/min (Fn= 0,33 mm)

BY USING THE OPTIONAL ELECTROSPINDLE 42CrMo4

- Available power: 4,4 kW**
- Working tool: Tap M60x5,5
  - Spindle speed: 40 rpm (Vc= 8 m/min)
  - Working feed: 220 mm/min (Fn= 5,5 mm)

BY USING THE OPTIONAL ELECTROSPINDLE IN INCONEL 625

- Available power: 52 kW**
- Material Removal rate: 930 cm<sup>3</sup> / min
  - Working tool: Mill ø50 mm (Z6)
  - Spindle speed: 4500 rpm (Vc= 700 m/min)
  - Working feed: 8100 mm/min (Fz= 0,3 mm)
  - Depth / Width of cut: ap= 3 mm / ae= 37 mm


Subject to change without prior motive. Informative contents are not binding.

- 1\_ General view
- 2\_ Application industries
- 3\_ Advantages
- 4\_ Characteristics
- 5\_ Machine Configuration
- 6\_ The range
- 7\_ Technological integration
- 8\_ Technical data

8.3\_ MACHINE DIMENSIONS

MACHINES EXTERNAL DIMENSIONS

Representative views of standard T12, T16 and T22 models, with access platform and adjacent modules or systems.

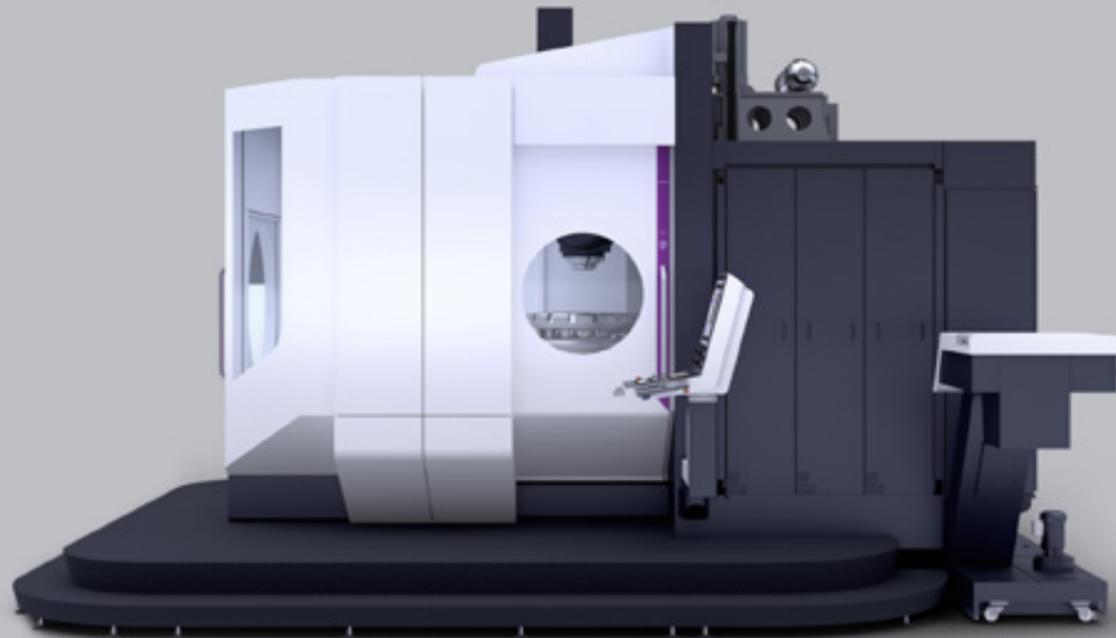


T SERIES

THC/THR 12

THC/THR 16

THC/THR 22

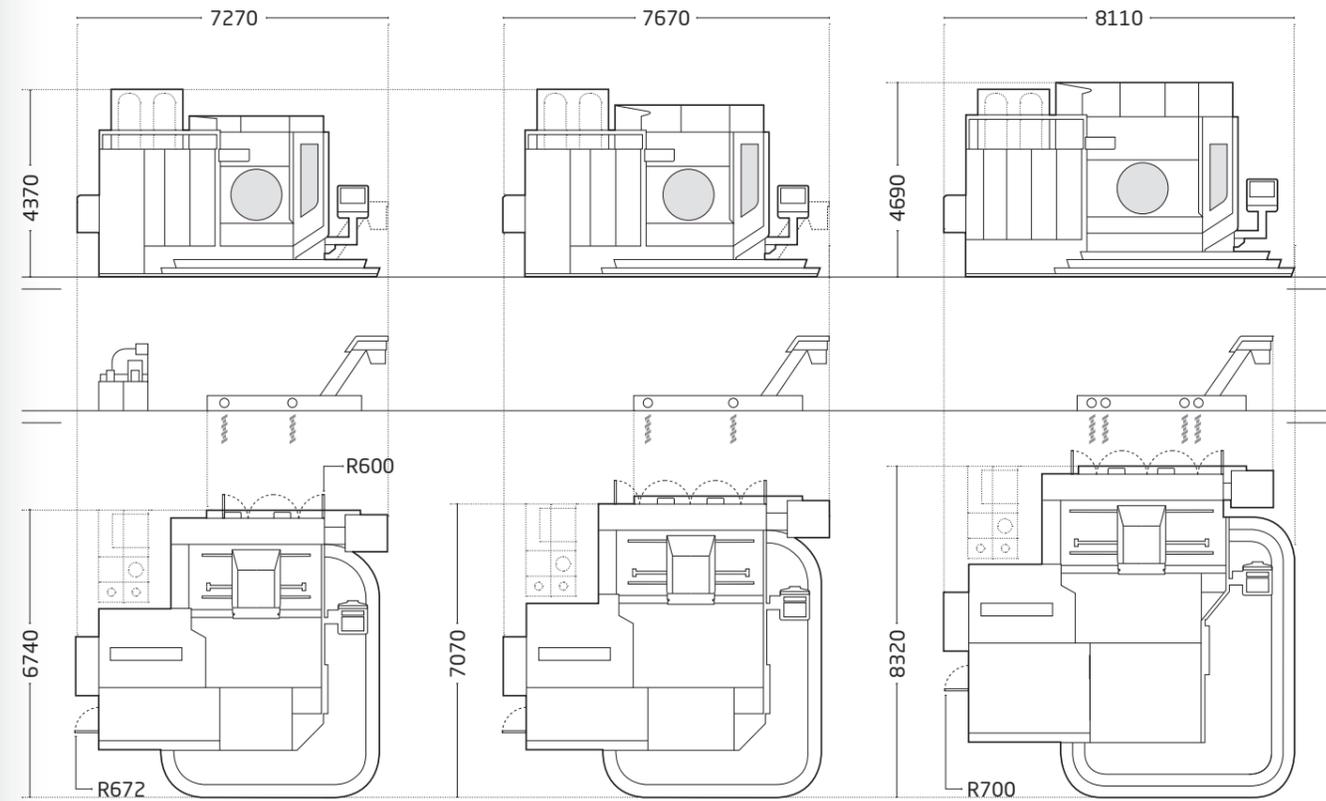

HIGH PRODUCTIVITY OF MEDIUM DIAMETER PARTS

HIGH PRODUCTIVITY OF BIG DIAMETER PARTS

Maximum swing diameter  
**ø 1250 mm**  
 Maximum part height  
**h 1600 mm**  
 Maximum load capacity  
**4500 Kg**

Maximum swing diameter  
**ø 1600 mm**  
 Maximum part height  
**h 1700 mm**  
 Maximum load capacity  
**6000 Kg**

Maximum swing diameter  
**ø 2200 mm**  
 Maximum part height  
**h 1750 mm**  
 Maximum load capacity  
**10.000 Kg**

## T MULTIPROCESS TECHNICAL DATA

### TRAVELS

	T 36	T 30	T 22	T 16	T 12
-X axis travel (length)	3600 mm	3000 mm	2200 mm	1600 mm	1200 mm
-Y axis travel (cross)	2300 mm	2000 mm	1600 mm	1600 mm	1300 mm
-Z axis travel (vertical)	1900 mm	1700 mm	1500 mm	1200 mm	1000 mm
-B - A axis heads tilting range	B: -15° / +195° - A: -45° / +135°				
-Maximum swing diameter	3600 mm	3000 mm	2200 mm	1600 mm	1250 mm
-Piece maximum height	2150 mm	1950 mm	1750 mm	1700 mm	1600 mm
-Distance spindle nose-table. Vertical (B axis)	100 / 2000 mm	100 / 1800 mm	100 / 1600 mm	100 / 1300 mm	100 / 1100 mm
-Distance spindle nose-table. Horizontal (B axis)	100 / 2000 mm	100 / 1800 mm	100 / 1600 mm	100 / 1300 mm	100 / 1100 mm
-Distance spindle nose-table. Vertical (A axis)	-115 / 1785 mm	-115 / 1585 mm	-115 / 1385 mm	-115 / 1085 mm	-115 / 885 mm
-Distance spindle nose-table. Horizontal (A axis)	260 / 2160 mm	260 / 1960 mm	260 / 1760 mm	260 / 1460 mm	260 / 1260 mm

### TABLE\*

	ø 2000 mm	ø 1800 mm	ø 1600 mm	ø 1200 mm	ø 1000 mm
-Table dimensions	22.500 - *16.000 kg	20.000 - *14.000 kg	10.000 - *6000 kg	6000 - *3000 kg	4500 - *2250 kg
-Maximum table load capacity (*turning)	90 rpm	88 rpm	189 rpm	258 rpm	300 rpm
-Nominal speed	150 rpm	200 rpm	400 rpm	500 rpm	500 rpm
-Maximum speed	12.000 Nm	10.000 Nm	4000 Nm	3000 Nm	1850 Nm
-Nominal torque					

### TILTING HEAD

-Turning torque	1210 Nm
-Position clamping force	7000 Nm

### MAIN SPINDLE

	Standard: HSK A 100 - Option: Capto C8
-Tool holder	Standard: 12.000 rpm - Option: 7000 rpm
-Maximum speed	Standard: 84 kW - Option: 75 kW
-Maximum power	Standard: 452 Nm - Option: 650 Nm
-Maximum torque	

### FEED

	30 m/min	50 m/min	60 m/min
Maximum working feed X-Y-Z axes	40 m/min	50 m/min	60 m/min
-Rapid feed for positioning X-Z axes	30 m/min	50 m/min	60 m/min
-Rapid feed for positioning Y axis	1,5 / 1,5 / 2 m/s <sup>2</sup>	2,5 / 2,3 / 4 m/s <sup>2</sup>	2,7 / 3,2 / 4,8 m/s <sup>2</sup>
-X-Y-Z axes acceleration	50 rpm		
-Rapid feed for positioning in B-A axes			

### ACCURACY VDI / DGQ3441

	12 µm	10 µm	7 µm	6 µm
-Positioning Tp X-Y-Z*	7 µm		5 µm	
-Repeatability	Rotary scale			
-Measuring system on B - A axes	+/-5 s			
-Positioning accuracy B - A axes	+/-4 s			
-Positioning accuracy C axis				

### CAPACITIES

-Milling capacity in steel St 60	1100 cm <sup>3</sup> /min
-Drilling capacity in steel St 60	ø 70 mm
-Tapping capacity in steel St 60	M 45 mm

### TOOL MAGAZINE

	Standard: 60. Option: 120, 240, 360
-Number of tools	600 mm
-Maximum tool length	30 kg
-Maximum tool weight	125 mm
-Maximum tool diameter with full magazine	250 mm
-Maximum tool diameter with free spaces	6 s
-Tool changing time*	16 s
-Chip to chip time	14 s
	12 s
	8 s
	7 s

### CNC CONTROL

-Available digital controls	Fanuc / Heidenhain / Siemens
-----------------------------	------------------------------

## T EXTREME TECHNICAL DATA

### TRAVELS

	T 36	T 30	T 22	T 16	T 12
-X axis travel (length)	3600 mm	3000 mm	2200 mm	1600 mm	1200 mm
-Y axis travel (cross)	2300 mm	2000 mm	1600 mm	1600 mm	1300 mm
-Z axis travel (vertical)	1900 mm	1700 mm	1500 mm	1200 mm	1000 mm
-B - A axis heads tilting range	B: -15° / +195° - A: -45° / +135°				
-Maximum swing diameter	3600 mm	3000 mm	2200 mm	1600 mm	1250 mm
-Piece maximum height	2150 mm	1950 mm	1750 mm	1700 mm	1600 mm
-Distance spindle nose-table. Vertical (B axis)	100 / 2000 mm	100 / 1800 mm	100 / 1600 mm	100 / 1300 mm	100 / 1100 mm
-Distance spindle nose-table. Horizontal (B axis)	100 / 2000 mm	100 / 1800 mm	100 / 1600 mm	100 / 1300 mm	100 / 1100 mm
-Distance spindle nose-table. Vertical (A axis)	-115 / 1785 mm	-115 / 1585 mm	-115 / 1385 mm	-115 / 1085 mm	-115 / 885 mm
-Distance spindle nose-table. Horizontal (A axis)	260 / 2160 mm	260 / 1960 mm	260 / 1760 mm	260 / 1460 mm	260 / 1260 mm

### TABLE\*

	1600 x 1600 mm	1250 x 1600 mm	1250 x 1250 mm	1000 x 1000 mm	800 x 800 mm
-Table dimensions	25.000 kg	20.000 kg	10.000 kg	6000 kg	4500 kg
-Maximum table load capacity	1,5 rpm				
-Nominal speed	30 rpm				
-Maximum speed	35 rpm				
-Nominal torque	5 rpm				
	40 rpm				
	50 rpm				
	18.000 Nm	13.000 Nm	6000 Nm	3100 Nm	2100 Nm

### TILTING HEAD

-Turning torque	1210 Nm
-Position clamping force	7000 Nm

### MAIN SPINDLE

	Standard: SK 50 - Option: BT 50 / HSK A-100 / Capto C8
-Tool holder	Standard: 12.000 rpm - Option: 7000 rpm
-Maximum speed	Standard: 84 kW - Option: 75 kW
-Maximum power	Standard: 452 Nm - Option: 650 Nm
-Maximum torque	

### FEED

	30 m/min	50 m/min	60 m/min
Maximum working feed X-Y-Z axes	40 m/min	50 m/min	60 m/min
-Rapid feed for positioning X-Z axes	30 m/min	50 m/min	60 m/min
-Rapid feed for positioning Y axis	1,5 / 1,5 / 2 m/s <sup>2</sup>	2,5 / 2,3 / 4 m/s <sup>2</sup>	2,7 / 3,2 / 4,8 m/s <sup>2</sup>
-X-Y-Z axes acceleration	50 rpm		
-Rapid feed for positioning in B-A axes			

### ACCURACY VDI / DGQ3441

	12 µm	10 µm	7 µm	6 µm
-Positioning Tp X-Y-Z*	7 µm		5 µm	
-Repeatability	Rotary scale			
-Measuring system on B - A axes	+/-5 s			
-Positioning accuracy B - A axes	+/-4 s			
-Positioning accuracy C axis				

### CAPACITIES

-Milling capacity in steel St 60	1100 cm <sup>3</sup> /min
-Drilling capacity in steel St 60	ø 70 mm
-Tapping capacity in steel St 60	M 45 mm

### TOOL MAGAZINE

	Standard: 60. Option: 120, 240, 360
-Number of tools	600 mm
-Maximum tool length	30 kg
-Maximum tool weight	125 mm
-Maximum tool diameter with full magazine	250 mm
-Maximum tool diameter with free spaces	6 s
-Tool changing time*	16 s
-Chip to chip time	14 s
	12 s
	8 s
	7 s

### CNC CONTROL

-Available digital controls	Fanuc / Heidenhain / Siemens
-----------------------------	------------------------------

**YOUR SERVICE POINT**

**IBARMIA SERVICE**

**YOUR SERVICE POINT**

When a customer becomes part of the IBARMIA family, that special link makes us work together throughout the machine's lifetime. Our service-point guides all technical and human resources to satisfy the customer's needs from the moment the machine enters its facilities.

WE BELIEVE IN SERVICE AND WE ARE COMMITTED TO THE PROFITABILITY AND RELIABILITY OF YOUR MACHINE; A PROVEN EFFICIENT SERVICE THAT IS VALUED BY OUR CUSTOMERS.



**TELEPHONE SUPPORT SERVICE BY EXPERT MULTILINGUAL STAFF**



**REACTION AND SOLUTION TIMES ADEQUATE TO THE CUSTOMER'S NEEDS**



**HIGHLY QUALIFIED TECHNICIANS**



**GLOBAL SERVICE VOCATION**



**MACHINE RECALIBRATION**

The accumulation of working hours and other factors might affect the machine's adjustment. At servicepoint we offer the possibility of readjusting the machines, leaving them almost as brand new.

**PERIODIC PREVENTION MAINTENANCE**

Servicepoint staff regularly checks and tunes up the machine, ensuring optimum machine availability.

**CRITICAL COMPONENTS HIRE**

Our machines have a high level of technology reflected on key elements of high value, and sometimes long delivery times. Following our commitment to reduce the machine breakdown times to a minimum, we stock those key elements for hire.

**CUSTOMIZED MAINTENANCE CONTRACTS**

Various levels of maintenance contracts adjustable to each customer.

**SPARE PART MANAGEMENT**

We are well aware of the importance of ensuring that the parts replaced in our machines maintain the same quality as the originals. Our spare part management service takes care of this.

**ASSISTANCE AND LOCAL SERVICE**

Our objective is to respond to our customers quickly, efficiently and at a reasonable cost. We are creating a global service network to ensure we respond to our clients in the shortest possible time.

**REMOTE AND ONLINE MONITORING AND DIAGNOSE**

It allows you to monitor the machine status remotely to ensure an intelligent diagnose of the key elements.



**IBARMIA SERVICE**




**ADVANCED DATA MANAGEMENT: ONLINE MONITORING AND DIAGNOSIS**

**SMART POINT SOFTWARE**

Thanks to our SMART POINT cloud monitoring system, we have real time information about the status of your machine, and we are able to make an intelligent diagnosis of the critical components. SMART POINT allows us to record and process the data collected on your machine, thus generating valuable information about the optimal use, the life cycle of the parts or the manufacturing process itself.

- Monitor your machines activity in real time from anywhere in the world
- Anticipate machine breakdowns and maximize its availability. Discover the root of the errors so you can correct them, as well as consumable exchange dates and component health status.

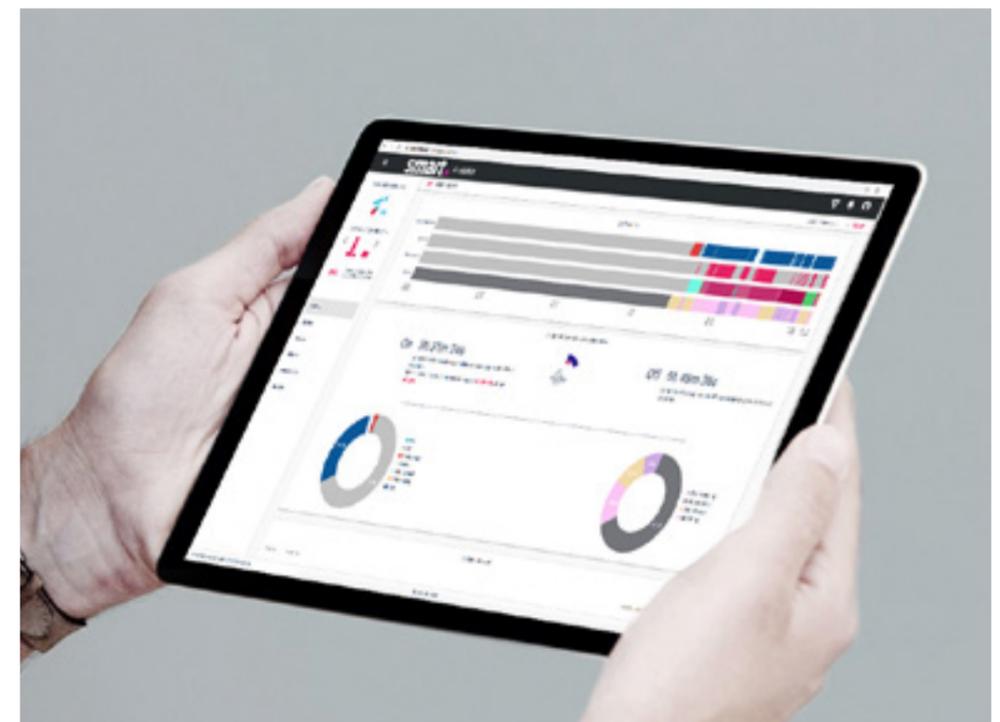



IBARMIA.

IBARMIA

GOING BIGGER, GETTING CLOSER

The last few years at IBARMIA have been intense in growth for the company. Determined to stay close to customers, the company has kept deepening the roots in the biggest markets of the world. This tendency will be kept in the future, with further development of these two areas of the world and others to come.



IBARMIA Azkoitia  
PRODUCTION CENTER  
(Gipuzkoa) Spain



IBARMIA Qingdao  
PRODUCTION CENTER  
IBARMIA Shanghai  
SALES OFFICE  
(Shandong-Shanghai) P.R. of China



IBARMIA Eislingen/Fils  
SALES & SERVICE OFFICE  
(Baden-Württemberg) Germany

70 IBARMIA.  
YEARS  
EST.1953



COMPETING IN THE  
GLOBAL MARKET




A YOUNG TEAM WITH  
HIGH FORMATION



INTEGRATED  
MANUFACTURING



TOTAL  
FLEXIBILITY

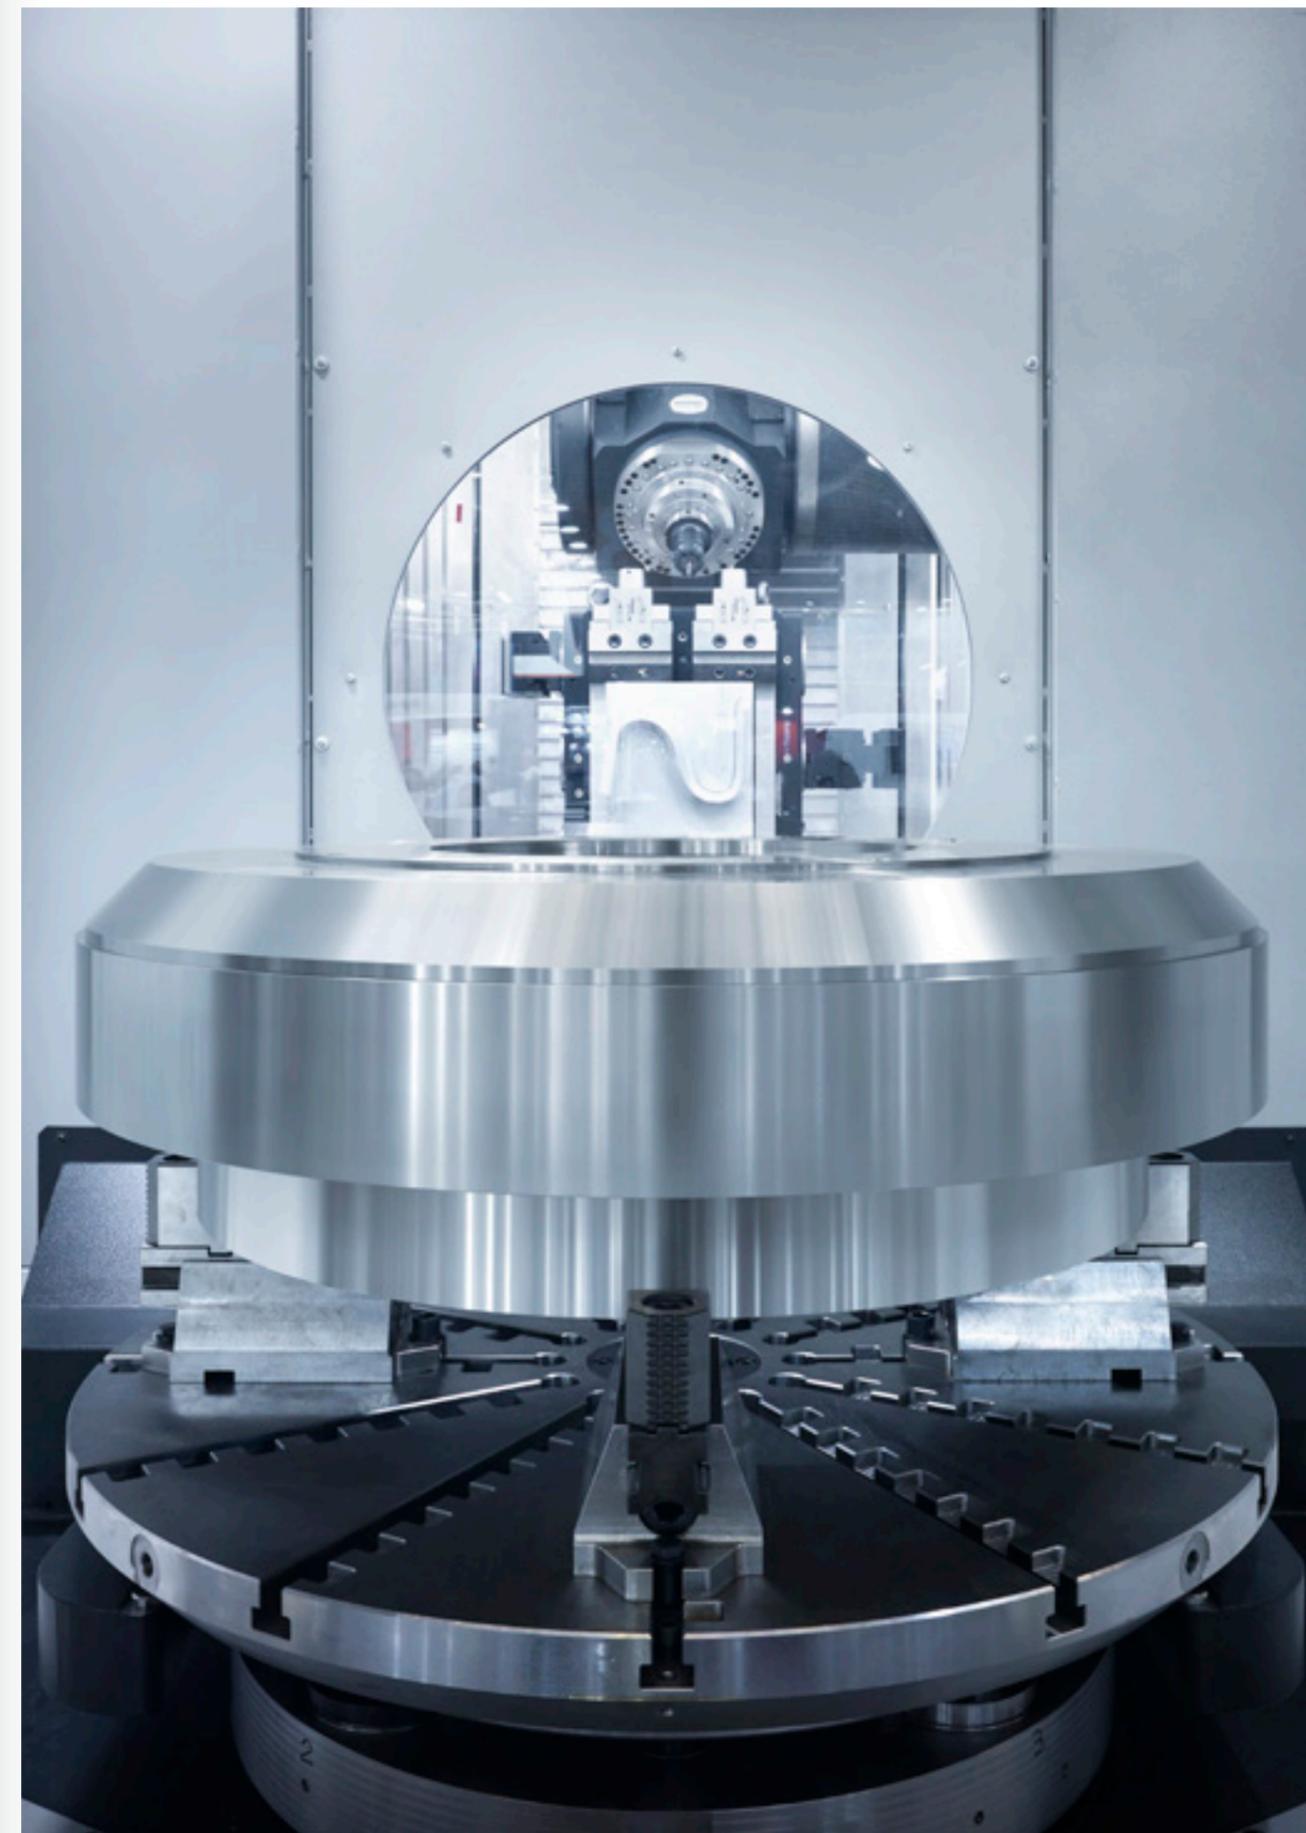

# YOUR MACHINE TOOL POINT

EST. 1953

**T SERIES**  
CENTROS DE  
MECANIZADO  
UNIVERSALES  
DE 5 EJES

**STG 2026**  
Sujeto a cambios  
sin previo aviso.  
Contenido informativo  
no vinculante.

---

IBARMIA suministra soluciones de gran valor añadido mediante la adaptación de máquinas altamente personalizadas y elevado componente tecnológico a los requisitos de sus clientes.

---



Diego Umantsoro, 6 - Apdo 35  
20720 Azkoitia (Gipuzkoa) Spain. T +34 943 857 000  
ibarmia@ibarmia.com

Síguenos en nuestras redes sociales



[www.ibarmia.com](http://www.ibarmia.com)

---